

Specification of CR 2

High Power Cylindrical Crimp-sealed
Primary Lithium Battery


Nominal Capacity * ¹		850 mAh
Nominal Voltage		3 V
Standard Discharge Current		10 mA
Max. Discharge Current	Continuous * ²	1000 mA
	Pulse * ³	2500 mA
Temperature Range		-20°C ~ +60°C
Weight		11 g
Dimensions	Height (H)	27,0 mm
	Diameter (D)	15,6 mm

*1 Nominal capacity is determined to an end voltage of 2,0V when the battery is allowed to discharge at a standard current level at 23°C.

*2 Current value is determined so that 50% of the nominal capacity is obtained with an end voltage of 2,0V at 23°C.

*3 Current value for obtaining 1,0V cell voltage when 15 sec. pulse applied at 50% discharge depth (23°C).

Dimensions

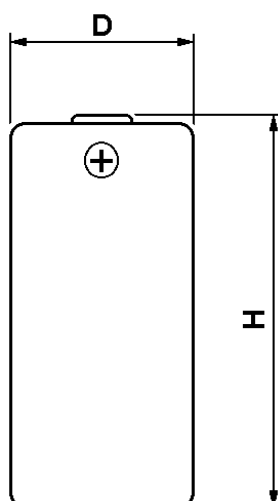

Size with shrinktube:

$$D = 15,6_{-0,5}$$

$$H = 27,0_{-0,7}$$

(unit: mm)