

[<-- back](#)

MODEL TL-2100

International size reference : AA, ER14505





TECHNICAL DATA

(Typical Values @+25°C for batteries stored for one year or less)


Nominal capacity @ 2mA TO 2V	2.1Ah
Rated voltage	3.6V
Maximum continuous current	100mA
Maximum pulse current capability	200mA
Rated 1 sec. pulse capability (to 3V)	40mA
Weight	17.4g (0.615oz.)
Operating temperature range	-55°C to +85°C


U.L. Component recognition MH 12193

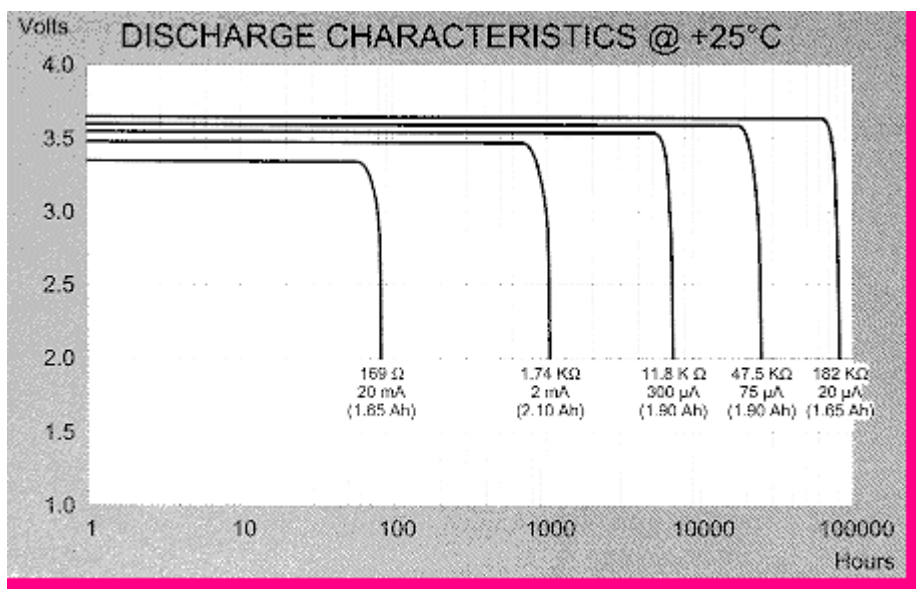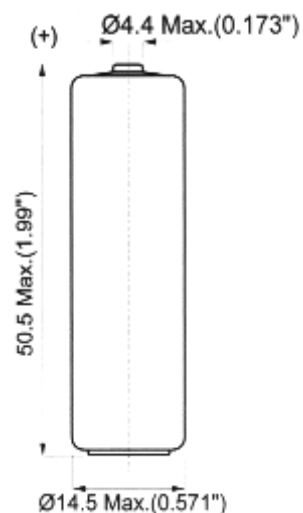

AVAILABLE TERMINATIONS

SUFFIX- /S	STANDAR
SUFFIX- /P	AXIAL PIN
SUFFIX- /T	SOLDER TABS
SUFFIX- /PT2	RADIAL PINS
SUFFIX- /PT/TP	POLARIZE TABS

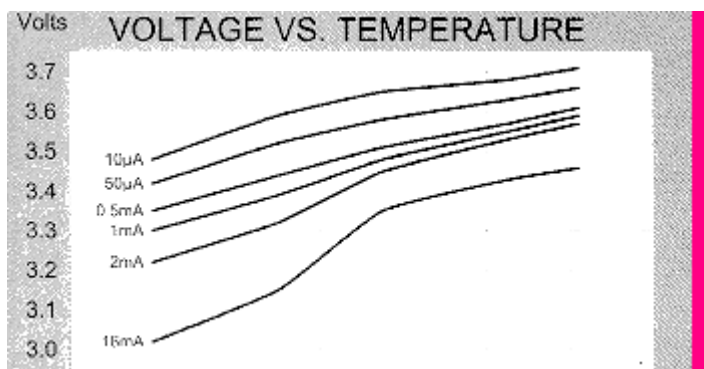



LITHIUM XTRA

Note: Any representations in this website concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.

