


## Specifications


Type : Nickel-Metal Hydride Battery		Size : B1	
Capacity <sup>1)</sup>	Typical	880mAh	
	Minimum	810mAh	
Nominal Voltage		1.2V	
Charging Current × Time	Fast Charge <sup>2)</sup>	880mA × about 1.2h	
Ambient Temp.	Charge Condition	Fast Charge <sup>2)</sup>	
	Discharge Condition		
	Storage Condition	~30days	0°C ~ 40°C
		30 ~ 90days	0°C ~ 50°C
90days ~ 1 year		-20°C ~ 50°C	
Internal Impedance <sup>3)</sup> (after discharge to E.V.=1.0V)		About 25mΩ (at 1000Hz)	
Weight <sup>4)</sup>		About 18g	
Size <sup>4)</sup> : (Width) × (Thickness) × (Height)		17.0(W) × 6.1 (T) × 48.0(H)mm	

- 1) Charge : 88mA × 16h, Discharge : 176mA (E.V.=1.0V) at 25°C
- 2) Use recommended charging system.
- 3) After a few charge and discharge cycles under the above 1) condition.
- 4) With tube.

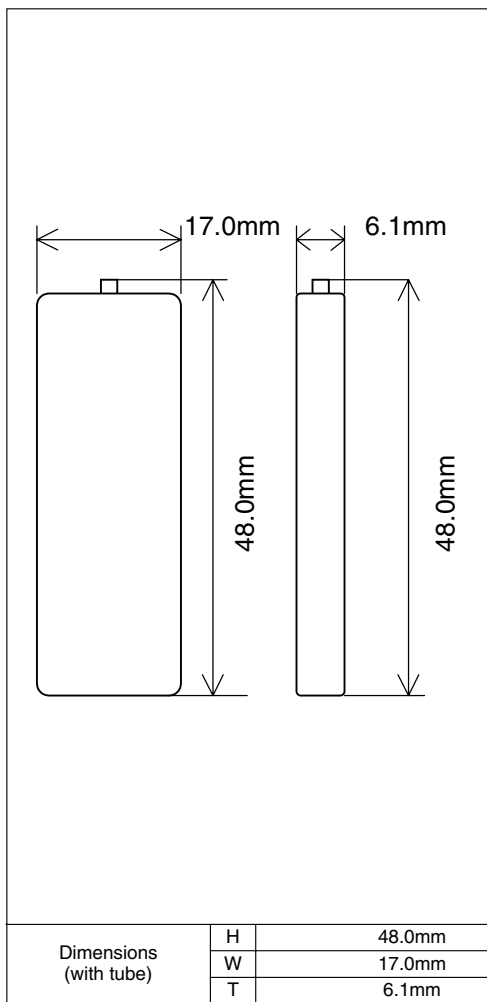

### Typical Characteristics

#### Charge

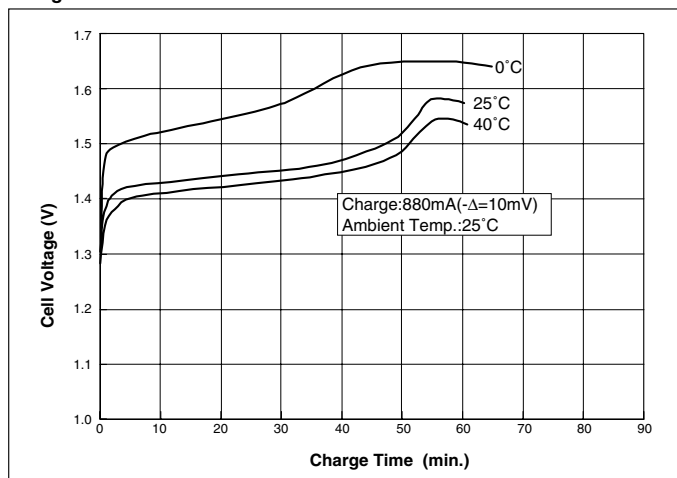

#### Discharge

