


Circuit diagram

Cell(电芯):	601730	Date code(喷码):	Inner controlling standard(内控标准)		
Min.Capacity 最低容量 (mAh) (0.2C, 25±3°C) *Single battery capacity (单体电池容量)	240	*PCM protection (保护板参数) (过流值) Only applicable for Max.Discharge current of 0.52A. (仅适用于最大0.52A的放电电流)	Overcurrent Detection(A)	2-6	
Typical Capacity 典型容量 (mAh) (0.2C, 25±3°C) *Single battery capacity (单体电池容量)	260		Overcharge Detection Voltage(V) (过充保护电压)	4.28±0.05	
Nominal Voltage 标称电压 (V)	3.7	Ambient Conditions (工作环境)	Overdischarge Detection Voltage(V) (过放保护电压)	2.3±0.1	
Internal impedance 内阻(≡) (mΩ, AC 1KHZ)	250	Charge Temp. 充电温度 (°C)	Discharge Temp. 放电温度 (°C)	-20-60	
		Humidity(湿度)		65±20%	

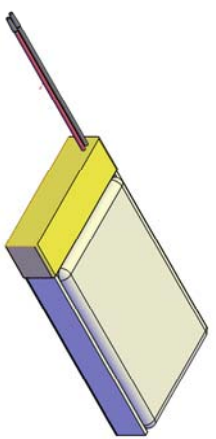

Remark(备注):  
 1. No scratch, distortion, discoloration and leakage on the appearance of the cell(电池表面无划痕、变形、污点及漏液等现象).  
 2. Rohs compliant(严格按照ROHS要求生产).

		Drawn:	Moyongdi	Revise No.:	E4-2009
		Checked 1:	Shelly	Projection:	
Title	LP601730-PCM-LD	Checked 2:	Keyan	Page:	1/1
File NO.	A03443	Approved:		Scale:	1.2 : 1
		Draw Date:	2010/07/08	Unit:	mm