


CONNECTOR PIN OUT


CONNECTOR/WIRE COLOR	SIGNAL	WIRE TYPE
BLACK	BATTERY -	16 AWG, PVC INSULATION, 26/30 STRANDED, 600V/105C, UL-1015
BLACK	BATTERY -	16 AWG, PVC INSULATION, 26/30 STRANDED, 600V/105C, UL-1015
RED	BATTERY +	16 AWG, PVC INSULATION, 26/30 STRANDED, 600V/105C, UL-1015
RED	BATTERY +	16 AWG, PVC INSULATION, 26/30 STRANDED, 600V/105C, UL-1015

1 ANDERSON CONNECTOR RED, PART #1327-BK
 ANDERSON CONNECTOR BLACK, PART # 1327G6-BK

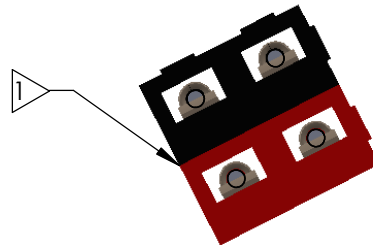

DETAIL A
SCALE 1.5 : 1

12.00 ±.06

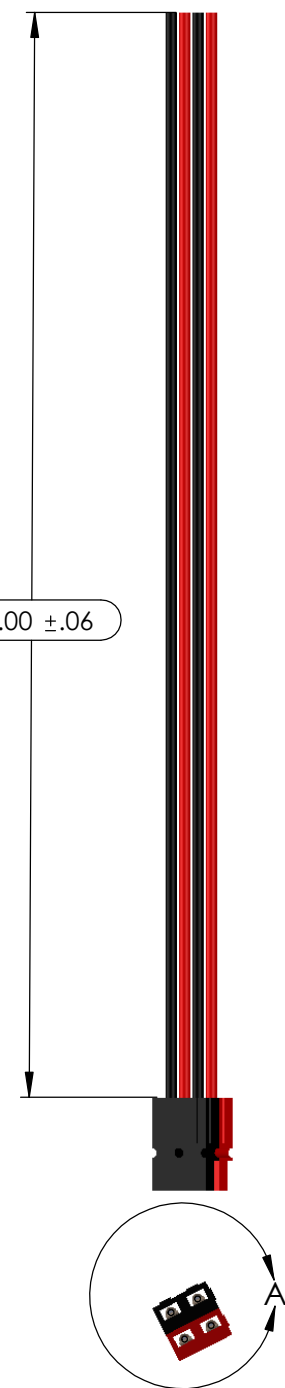

CRITICAL TO QUALITY

saft	313 Crescent Street Valdese, NC 28690 USA Telephone 828-874-4111 Fax 828-874-2431	THIS DRAWING OR SPECIFICATION IS THE PROPERTY OF SAFT AMERICA INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS THE BASIS FOR THE MANUFACTURE OR SALES OF APPARATUS WITHOUT PERMISSION. THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE.	DRAWN BY:	DATE:	UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES TOLERANCES: ANGLES: ± 0° - 30' FRACTIONS: ± 1/16 2 PLACE DECIMALS: ± .02 3 PLACE DECIMALS: ± .005	CHECKED BY:	DATE:	SIZE: A SCALE: NONE CAGE: 7X634	TITLE	REV HISTORY ON SHEET 1 ONLY REV P2
			SGH	11/4/13		APPROVED BY:	DATE:		SHEET	
			THIS DRAWING BASED ON ANSI Y14.5M-1994					2 OF 2	POWER INTERFACE HARNESS 326634	