

This specification is applicable to the following Alkaline Batteries Supplied to SANYO Energy (Singapore) Corporation Pte. Ltd. from GPI International Ltd.

- 1. Type : 6LF22
- 2. Nominal Voltage : 3.0V
- 3. Height and Diameter : See Fig. 1
- 4. Nominal Weight : 40g
- 5. Terminal : zinc terminal
- 7. Usage Characteristics

7.1 Dimension

7.2 Terminal

7.3 Appearance

7.4 Electrical Characteristic

Specification of Alkaline Batteries

Item	Requirement		Test Conditions
Open-Circuit Voltage (V)	Initial	Over 9.10	Temp. : 20 +/- 2 centigrade RH : 65 +/- 20%
	After 12 months	Over 9.00	
Closed-Circuit Voltage (V)	Initial	Over 6.70	Temp. : 20 +/- 2 centigrade RH : 65 +/- 20% Load : 180 ohm
	After 12 months	Over 6.70	
Service Life (H) at 180 ohm	Initial	Over 10.0	Temp. : 20 +/- 2 centigrade RH : 65 +/- 20% Load : 180 ohm End Voltage : 5.4V
	After 12 months	Over 9.0	

type : 6LF22

Approval

7.5 Leakage Resistibility

(Table 2)

Item	Requirement
High Temperature Leakage Test	Temp. : 55 +/- 2°C There shall be no deformation in over MAX. dimensions shown in product dimensions and no visible leakage.
Over Discharge Leakage Test	Temp. : 20 +/- 2°C RH : 65 +/- 20% Load : 180 ohm Over Discharge Time : 12 hours

Issued : 01. Apr. 1999

SANYO Electric Co., Ltd.
Soft Energy Business Headquarters
Overseas Sales Dept.
(TEL : ++81-6-6900-3775)
(FAX : ++81-6-6901-7797)

1. Scope : This specification is applicable to the following Alkaline Batteries Supplied to SANYO Energy (Singapore) Corporation Pte. Ltd. from GPI International Ltd.
2. Type : 6LF22
3. Nominal Voltage : 9.0V
4. Figure and Dimensions : See Fig. 1
5. Standard Weight : 46g
6. Terminals : snap terminal
7. Quality Characteristics
 - 7.1 Dimensions : Dimensions are shown in Fig. 1.
 - 7.2 Terminal : There shall be no rust or deformation that occurs troubles practically.
 - 7.3 Appearance : There shall be no rust, deformation or scratch that occurs troubles practically.
 - 7.4 Electrical Characteristics

(Table 1)

Item		Requirement		Test Conditions
Open-Circuit Voltage (V)	Initial	Over 9.10	Temp. : 20 +/- 2 centigrade RH : 65 +/- 20%	
	After 12 months	Over 9.00		
Closed-Circuit Voltage (V)	Initial	Over 8.80	Temp. : 20 +/- 2 centigrade RH : 65 +/- 20% Load : 180 ohm	
	After 12 months	Over 8.70		
Service Life (H)	Discharge at 180 ohm	Initial	Over 10.0	Temp. : 20 +/- 2 centigrade RH : 65 +/- 20% Load : 180 ohm End Voltage : 5.4V
		After 12 months	Over 9.0	

7.5 Leakage Resistabilty

(Table 2)

Item	Test Conditions	Requirement
High Temperature Leakage Test	Temp. : 45 +/- 2°C RH : Under 70% Storage Period : 1 month	There shall be no deformation in excess over MAX. dimensions shown in product dimensions and no visible leakage.
Over Discharge Leakage Test	Temp. : 20 +/- 2 centigrade RH : 65 +/- 20% Load : 180 ohm Over Discharge Time : 12 hours	

8. Test

8.1 Storage and Test Conditions

(1) Storage Condition

Unless otherwise specified, storage condition shall be kept at 20 +/- 2 centigrade and at 65 +/- 20%RH.

(2) Test Condition

Unless otherwise specified, test shall be conducted at 20 +/- 15 centigrade and at 65 +/- 20%RH.

8.2 Instruments and Devices

(1) Voltmeters

The voltmeters shall be of Class 0.5 or better specified in JIS C1102 (Electrical Indicating Instruments) and shall have a internal resistance not less than 1,000ohm/V.

But voltmeters for service life test shall have a internal resistance not less than 1,000ohm/V or not less than 10 times of load resistance, which ever is larger.

(2) Load Resistance

The load resistance shall include all resistances in external circuit, and its tolerance shall be +/- 0.5%.

(3) Calipers

Calipers shall be type M, Grade 1 as specified in the JIS B7507 or those having equal or better precision.

8.3 Test Methods

(1) Dimensions

Measurement shall be made with calipers or measuring device having equal or better precision specified in 8.2 (3).

(2) Terminals

Visually.

(3) Appearance

Visually.

(4) Open-Circuit Voltage

Shall be measured with a volt meter specified in 8.2 (1), after the batteries have been leaving at 20 +/- 2 centigrade for 8 hours minimum.

(5) Closed-Circuit Voltage

Shall be measured with a volt meter specified in 8.2 (1), under the load specified in table 1, after the batteries have been leaving at 20 +/- 2 centigrade for 8 hours minimum.

(6) Service Life

The test batteries shall be leave at 20 +/- 2 centigrade and 65 +/- 20% RH, for 8 hours minimum and then shall be discharged continuously as specified in table 1.

(7) Overdischarge Leakage Test

The test batteries shall be leave at 20 +/- 2 centigrade and 65 +/- 20% RH, for 8 hours minimum and then shall be discharged as specified in table 2, and shall then be inspected visually for leakage and measured for deformation with calipers.

(8) High Temperature Leakage Test

The test batteries shall be started at 45 +/- 2 centigrade and at less than 70% RH for 1 month, and shall then be inspected for leakage and deformation by visual means and by use of calipers.

9. Quality Incoming Inspection

9.1 Inspection item and its method

Inspection shall be done by normal sampling plan as per MIL STD 105D, unless it is specified.

The criterion shall be shown in Table 3.

(Table 3)

NO	Tests		Inspection Level	A.Q.L. (%)
1	Open Circuit Voltage		II	0.15
2	Duration Time		n=5	C=0
3	Dimensions		S-4	0.65
4	Appearance	Major	II	0.15
		Minor	II	1.0

※ Remarks

MAJOR DEFECT : Leakage
Mistake on Brand
Rusting or Corroded
Excessive Tool Marks

MINOR DEFECT : Scratches
Poor Graphics
Indistinct Marking

9.2 Inspection Lot


One lot of supply to be a inspection lot.

9.3 The starting time of inspection

The inspection shall be started within one month after the supply.

(Fig.1)

6LF22 Dimension Drawing

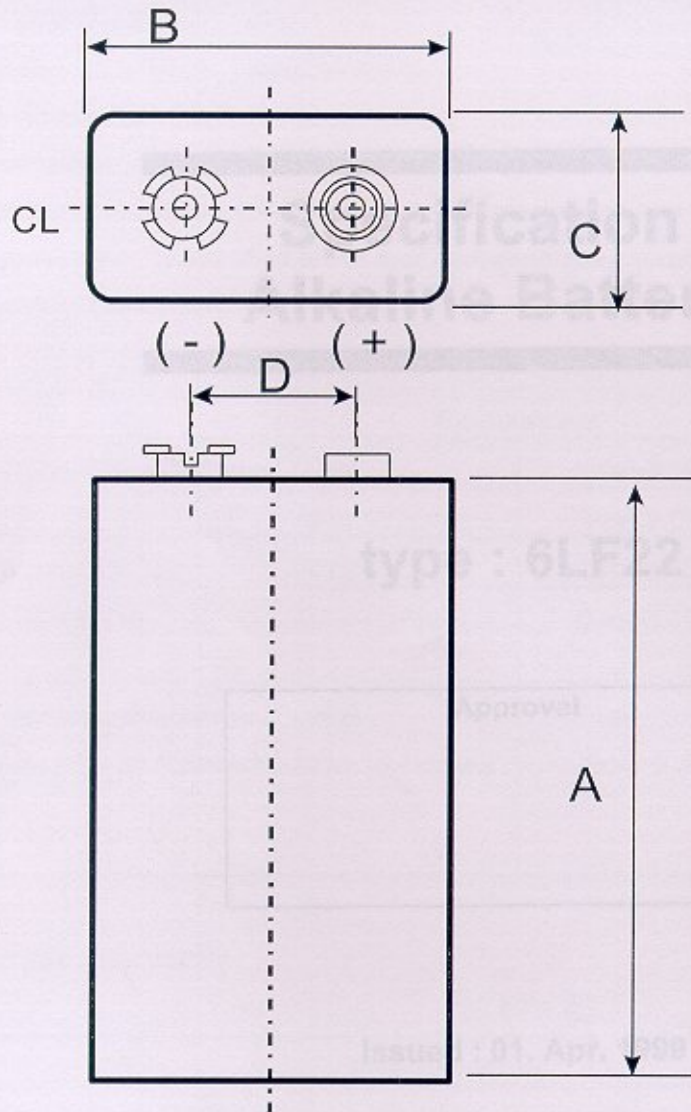

Sign	Dimension
A	46.5 - 48.5
B	24.5 - 26.5
C	15.5 - 17.5
D	12.5 - 13.1

Unit : mm

Terminal : Snap Terminal

(Remarks)

This battery uses an expiry date code (three years) instead of a manufacturing date code.

Example : 07- 02

month - Christian Era