

SR Button Cells Primary Silver Oxide

mercury-free



Product Overview


Type Designation	Type No.	Voltage (V)	Capacity (mAh)	Diameter (mm)	Height (mm)	Weight (g)
------------------	----------	-------------	----------------	---------------	-------------	------------

Silver Oxide Button Cells (Ag₂O)



Mercury-free

V 301 MF	20301	1.55	82	11.6	4.20	1.78
V 303 MF	20303	1.55	160	11.6	5.40	2.33
V 309 MF	20309	1.55	73	7.9	5.40	1.08
V 315 MF	20315	1.55	20	7.9	1.65	0.33
V 317 MF	20317	1.55	10.5	5.8	1.60	0.18
V 319 MF	20319	1.55	21	5.8	2.66	0.29
V 321 MF	20321	1.55	14.5	6.8	1.65	0.25
V 329 MF	20329	1.55	37	7.9	3.10	0.60
V 335 MF	20335	1.55	6	5.8	1.25	0.15
V 337 MF	20337	1.55	9	4.8	1.65	0.13
V 339 MF	20339	1.55	12	6.8	1.40	0.21
V 341 MF	20341	1.55	15	7.9	1.45	0.28
V 344 MF	20344	1.55	105	11.6	3.60	1.49
V 346 MF	20346	1.55	10	7.9	1.29	0.30
V 350 MF	20350	1.55	105	11.6	3.60	1.49
V 357 MF	20357	1.55	145	11.6	5.40	2.33
V 361 MF	20361	1.55	22	7.9	2.10	0.40
V 362 MF	20362	1.55	21	7.9	2.10	0.40
V 364 MF	20364	1.55	17	6.8	2.15	0.31
V 370 MF	20370	1.55	30	9.5	2.10	0.57
V 371 MF	20371	1.55	30	9.5	2.10	0.61
V 373 MF	20373	1.55	28	9.5	1.60	0.50
V 377 MF	20377	1.55	21	6.8	2.60	0.34
V 379 MF	20379	1.55	15	5.8	2.15	0.23
V 381 MF	20381	1.55	49	11.6	2.10	0.90
V 384 MF	20384	1.55	37	7.9	3.60	0.69
V 386 MF	20386	1.55	115	11.6	4.20	1.78
V 389 MF	20389	1.55	81	11.6	3.05	1.31
V 390 MF	20390	1.55	59	11.6	3.05	1.32
V 391 MF	20391	1.55	42	11.6	2.10	0.90
V 392 MF	20392	1.55	40	7.9	3.60	0.69
V 393 MF	20393	1.55	77	7.9	5.40	1.08
V 394 MF	20394	1.55	58	9.5	3.60	1.04
V 395 MF	20395	1.55	38	9.5	2.70	0.68
V 396 MF	20396	1.55	32	7.9	2.60	0.55
V 397 MF	20397	1.55	23	7.9	2.60	0.50
V 399 MF	20399	1.55	42	9.5	2.70	0.75

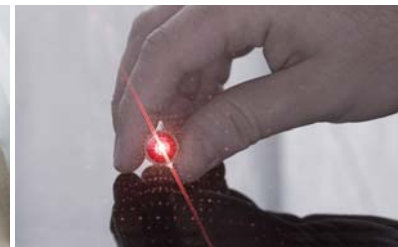

Mercury-free and environment

Since 2010 **VARTA Microbattery** provides the whole silver oxide button cell assortment mercury-free. This is a further milestone in the development of high performance, reliable and environment-friendly batteries.



Quality

- Highest leakage resistance – innovative sealing technology
- Constant voltage level – fully automatic production lines
- Low self-discharge rate – highly precise production
- Long running time – highest quality raw materials

Customized solutions

As a system supplier **VARTA Microbattery** offers complete design packages with the development of new battery assemblies.

Applications

VARTA Microbattery's silver oxide cells are used in a variety of electronic applications. Their reliability and performance make them the preferred power supply for different miniature medical devices and the choice of many other OEM's.

Typical applications:

- Watches
- Medical devices
- Calculators
- Toys
- Remote controls
- Laser pointer



Single cell or assembled power pack – **VARTA** Button Cells for every application!



Contact

Headquarters

VARTA Microbattery GmbH
VARTA-Platz 1
73479 Ellwangen, Germany
Tel +49 7961 921-0

Representations and distributors in all major countries worldwide.
Please see webpage.



Visit us on our youtube channel and follow us with a click on the button subscribe.

<https://www.youtube.com/channel/UCR2dORIUzLktQ2MiZ3Fw2BA/videos>



<https://www.linkedin.com/company/vartamicrobattery>



<https://www.youtube.com/channel/UCR2dORIUzLktQ2MiZ3Fw2BA>



<https://de-de.facebook.com/varta.ag/>



<https://www.xing.com/companies/vartamicrobatterygmbh>

VARTA Microbattery GmbH is a company of VARTA AG.

www.varta-microbattery.com