



Title: Coin Type Lithium ion Rechargeable Battery	Number: PD2032-05614
Model: <i>Powerdisc 2032</i>	Date: 2005. 6. 14      Rev:F

**PRODUCT SPECIFICATIONS OF COIN TYPE LI-ION RECHARGEABLE BATTERY**

**MODEL: PD2032**

**PRESENTED TO:** \_\_\_\_\_

Accepted by :

Date:

*Korea PowerCell Inc.*

Prepared by : Sung-Chul Kim            (       )

Approved by : Geun-Chang Chung       (       )

Date :

Title: Coin Type Lithium ion Rechargeable Battery	Number: PD2032-05614
Model: <i>Powerdisc 2032</i>	Date: 2005. 6. 14      Rev:F

## **CONTENTS**

1. Preface
2. Description
3. Specifications
4. Dimensions of PD2032
5. Standard Test Conditions
6. Electrical Characteristics
  - 6.1 Standard Charge and Discharge conditions
  - 6.2 Initial Discharge Capacity
  - 6.3 Initial Internal Impedance
  - 6.4 Cycle Life
  - 6.5 Temperature Dependence of Discharge Capacity
  - 6.6 Discharge Characteristics on Current Load (C-Rate)
  - 6.7 Storage characteristics
7. Safety Test
8. Shipment
9. Warranty
10. Precautions and Safety Instructions
  - 10.1 Standard Battery Precaution
  - 10.2 Battery Operation Instruction
    - A. Charging
    - B. Discharging
    - C. Protection Circuit
    - D. Storage Recommendation
11. Consultation
12. Requirement for Safety Assurance

Title: Coin Type Lithium ion Rechargeable Battery	Number: PD2032-05614
Model: Powerdisc 2032	Date: 2005. 6. 14 Rev:F

## 1. Preface

This Product Specification describes the requirements of Coin Type Lithium-ion Rechargeable Battery ("Cell") to be supplied to customer by **Korea PowerCell Inc.**

## 2. Description


2.1 Product	<b>Lithium-ion Rechargeable Battery</b>
2.2 Model (Type)	<b>Powerdisc 2032 (PD2032)</b>

## 3. Specifications

Item	Specification	Remark
3.1 Nominal Capacity	75 mAh	0.2C rate, 3.0V cut-off
3.2 Nominal Voltage	3.7 V	From 4.20 V to 3.00V
3.3 Charging Method	CC/CV	Constant Current / Constant Voltage
3.4 Charging Current (Std.)	0.5CA (37mA)	0 ~ 45°C
3.5 Charging Voltage	4.2 ± 0.03 V	
3.6 Charging End Condition	7~2mA	At CV mode
3.7 Charging Time (Std.)	> 3.0 hours	
3.8 Discharge Current (Std.)	0.5CA (37mA)	- 20 ~ 60°C
3.9 Discharge Current (Max)	2CA (150mA)	- 20 ~ 60°C
3.10 Discharge Cut-off Voltage	3.0 V	
3.11 Cell Weight	Approx. 3.1g	
3.12 Storage Temperature Range	-20 ~ 35°C	

Title: Coin Type Lithium ion Rechargeable Battery	Number: PD2032-05614
Model: Powerdisc 2032	Date: 2005. 6. 14 Rev:F

## 4. Dimensions (unit : mm)

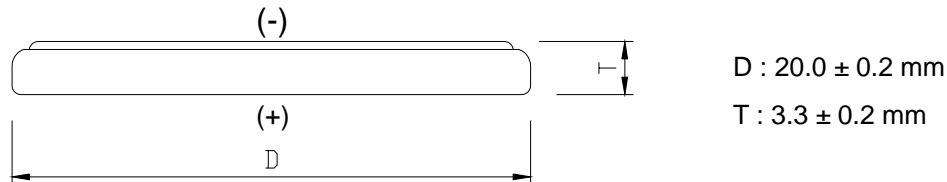

## 5. Standard Test Conditions

Unless otherwise specified, all tests stated in this Product Specification are conducted at temperature  $25 \pm 3^{\circ}\text{C}$  and humidity  $65 \pm 20\%$  RH.

## 6. Electrical Characteristics

### 6.1 Standard Charge and Discharge Conditions

The "Standard Charge" means charging the Cell with initial charge current 37mA (0.5C) and with a constant voltage 4.20V ( $\pm 0.03$  V) and a cut off current 2mA at  $25^{\circ}\text{C}$  for 3.0 hours.

The "Standard Discharge" means discharging the Cell with constant discharge current 37mA (0.5C) and with 3.0V cut-off voltage at  $25^{\circ}\text{C}$ .

### 6.2 Initial Discharge Capacity

The initial capacity measured under the standard test conditions stated in 6.1

Initial Discharge Capacity Typical 75mAh, Minimum 70mAh

### 6.3 Initial Internal Impedance

Internal resistance measured at 1KHz after Standard Charge.

Initial Internal Impedance  $\leq 1000 \text{ m}\Omega$

### 6.4 Cycle Life

Capacity after 400 cycles, measured under the test conditions stated in 6.1.

Capacity  $\geq 52 \text{ mAh}$  after 400cycles

Title: Coin Type Lithium ion Rechargeable Battery	Number: PD2032-05614
Model: <i>Powerdisc 2032</i>	Date: 2005. 6. 14    Rev:F

\* Capacity  $\geq$  37mAh after 500 cycles

#### 6.5 Temperature Dependence of Discharge Capacity

Relative capacity at each temperature, measured with constant discharge current 15mA (0.2C) with 2.75V cut-off after the Standard Charge shown below.

Charge Temp.	Discharge Temp.			
25 °C	-20 °C	-10 °C	25 °C	60 °C
	>60 %	>80%	100 %	>95%

#### 6.6 Discharge Characteristics on Current Load (C-Rate)

Relative capacity at each load, measured with constant discharge current 0.2C, 0.5C, 1.0C, 2C with 3.00V cut-off after Standard Charge shown below.

Charge Current	Discharge Current			
Standard Charge	0.2 CA	0.5 CA	1 CA	2.0 CA
	15 mA	37 mA	75mA	150 mA
	100 %	>95 %	> 85 %	> 30%

#### 6.7 Storage characteristic

After stored at the following several conditions, the battery is measured at the standard charge and discharge condition stated in 6.1.

Storage condition	Charge state	Capacity retention	Capacity recovery
20 days at 60°C	Shipping charge	-	>85%
20 days at 60°C	Full charge	> 70%	> 85%
60 days at 60°C	Full charge	> 40%	> 60%
30 days at 60°C, 90%RH	Full charge	> 40%	> 70%

Title: Coin Type Lithium ion Rechargeable Battery	Number: PD2032-05614
Model: Powerdisc 2032	Date: 2005. 6. 14 Rev:F

## 7. Safety Test

Test Item	Test Method	Criteria
7.1 High Temperature	Storing a Cell at 90℃ for 4 hours after charged at 4.2 V	No leakage
7.2 High Temperature and High Humidity	Storing a Cell at 60℃ ( 90 % RH ) for 1 week after charged at 4.2V.	No leakage
7.3 Thermal Shock Test	Storing a fully charged Cell(4.2V) at 60℃ for 2hour and at -20℃ for 2hour (10 cycle). Total 10 cycles with the maximum transition time, 5 mins.	No leakage
7.4 Hot Box Test	A cell is to be heated in a gravity convection oven. The temperature of the oven is to be raised at a rate of $5\pm2^{\circ}\text{C}$ per minute to a temperature of $150\pm2^{\circ}\text{C}$ and remain for 10 minutes at the temperature before the test is discontinued.	No explosion, No fire
7.5 Overcharge Test	Charging the Cell up to 250% of its Nominal capacity at 25℃ for 2.5 hours.	No explosion, No fire
7.6 Impact Test	A test cell is to be placed on a flat surface. The bar of 9.1 kg weight and 15.8 mm diameter is dropped from a height of 610 mm onto the cell.	No explosion, No fire
7.7 Short-Circuit Test	A Cell is to be short-circuited by connecting the positive and negative terminals of the battery with copper wire having a maximum resistance load of 100mΩ.	No fire or no explosion, until it is completely discharged
7.8 Nail Test	A stainless steel nail having a diameter of 4.0 mm is punched through the cell until the nail has passed through the opposite side of the cell.	No explosion, No fire
7.9 Applying Pressure	Giving Pressure on whole surface of a fully charged cell with 7kg <sub>f</sub> for 72 hours	No leakage, No weight decrease

Title: Coin Type Lithium ion Rechargeable Battery	Number: PD2032-05614
Model: Powerdisc 2032	Date: 2005. 6. 14      Rev:F

## 8. Shipment

The Cell shall be shipped in 25% charged state. (Cell voltage range: 3.7 ~ 3.8 V)

\*The remaining capacity before charging shall be changed depending on the storage time and conditions.

## 9. Warranty

The Warranty of battery is one year from the date of shipment. However, even though the problem occurs within this period, PowerCell won't replace a new battery for free as long as the problem is not due to the failure of PowerCell manufacturing process or is due to customer's abuse or misuse.

- PowerCell will not be responsible for trouble occurred by handling outside of the precautions in this specification.
- PowerCell will not be responsible for trouble occurred by matching electric circuit, battery pack and charger.
- PowerCell will be exempt from warrantee any defect cells during assembling after acceptance.

## 10. Precautions and Safety Instructions

Lithium-Ion rechargeable batteries subject to abusive conditions can cause damage to the battery and/or personal injury. Please read and observe the standard battery precautions below before using utilization.

**Note 1.** The customer is required to contact PowerCell in advance, if and when the customer needs other applications or operating conditions than those described in this document.

**Note 2.** PowerCell will take no responsibility for any accident when the cell is used under other conditions than those described in this Document.

Title: Coin Type Lithium ion Rechargeable Battery	Number: PD2032-05614
Model: Powerdisc 2032	Date: 2005. 6. 14 Rev:F

## 10.1 Precautions and Safety Instructions:

- a. Do not expose the battery to extreme heat or flame.
- b. Do not short circuit, over-charge or over-discharge the battery.
- c. Do not subject the battery to strong mechanical shocks.
- d. Do not immerse the battery in water or sea water, or get it wet..
- e. Do not reverse the polarity of the battery for any reason.
- f. Do not disassemble or modify the battery.
- g. Do not remove charge/discharge protection circuitry.
- h. Do not handle or store with metallic like necklaces, coins or hairpins, etc.
- i. Do not use the battery with conspicuous damage or deformation.
- j. Do not connect battery to the plug socket or car-cigarette-plug.
- k. Do not make the direct soldering onto a battery. Weld spot welding lead plate onto a battery.
- l. Do not touch a leaked battery directly.
- m. Do not use for other equipment.
- n. Do not use Lithium-ion battery in mixture.
- o. Do not use or leave the battery under the blazing sun (or in heated car by sunshine).
- p. Keep battery away from children.
- q. Do use the specified charger and observe charging requirement.
- r. Do not drive a nail into the battery, strike it by hammer or tread it.
- s. Do not give battery impact or fling it.

## 10.2 Battery Operation Instruction:

### A. Charging

- a. Charge the battery in a temperature range of 0°C to + 45°C.
- b. Charge the battery at a constant current of 0.5C until 4.20±0.03V per cell is attained. Charge rates greater than 0.5C are NOT recommended. (C : Rated Capacity of Battery)
- c. Maintain charge voltage at 4.20V per cell for 3.0 hours (recommended for maximum capacity).

\* Use a constant current, constant voltage (CC/CV) lithium-ion (Li+) battery charge controller.

\* Do not continue to charge battery over specified time.



Title: Coin Type Lithium ion Rechargeable Battery	Number: PD2032-05614
Model: <i>Powerdisc 2032</i>	Date: 2005. 6. 14      Rev:F

**B. Discharging**

- a. Recommended cut-off voltage to 3.0V. Recommended maximum discharge rate is 2C at constant current.
- b. For maximum performance, discharge the battery in a temperature range of -20°C to + 45°C.

**C. Protection Circuit**

Protection circuit can be provided upon request. However, protection circuit may be omitted for most applications without damaging performance and safety. Please consult our engineering staff for technical advice.

**D. Storage Recommendations**

- a. Storage Temperature and Humidity
  - Storage the battery at temperature range of -20 ~ +35°C, low humidity and no corrosive gas atmosphere.
  - No condensation on the battery
- b. Long Period Storage
  - In case of long period storage (more than 3 months), storage the battery at temperature range of -10 ~ +20°C, low humidity, no corrosive gas atmosphere.
  - No condensation on the battery

**11. Consultation**

As to the obscurity, contact the following.

**PowerCell Korea Inc.** Sales & Marketing Division

[sales@powercellkorea.com](mailto:sales@powercellkorea.com)

Tel : +82-42-864-0255

Fax : +82-42-864-4342

**12. Requirement for Safety Assurance**

For the sake of safety assurance, please discuss the equipment design, its system and protection circuit of Lithium-ion battery with PowerCell in advance.

And consult about the high rate current, rapid charge and special application in the same way.