


## Cell Type UF653048P(950mAh)

### Specifications

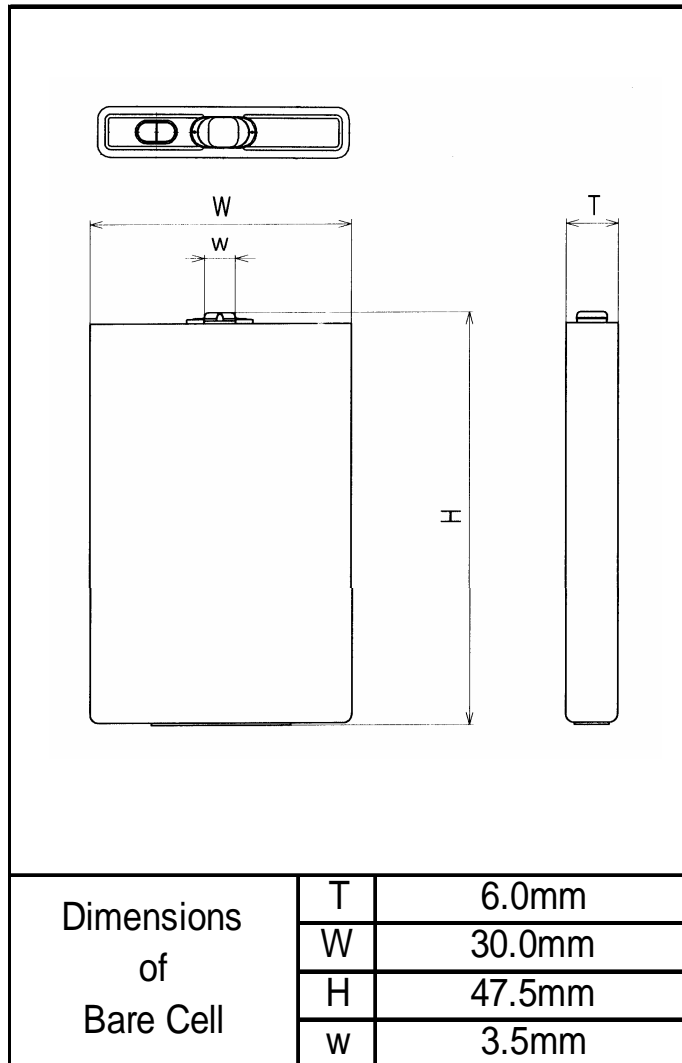

Nominal Capacity		Min.950mAh
Nominal Voltage		3.7V
Charging Method		Constant Current -Constant Voltage
Charging Voltage		4.2V
Charging Current		Std. 950mA
Charging Time		2.5hrs.
Ambient Temperature	Charge	0 ~ +40
	Discharge	-20 ~ +60
	Storage	-20 ~ +50
Weight (Max.)		20.2g
Dimensions (Max.)	(T)	6.40mm
	(W)	30.15mm
	(H)	47.80mm
Volumetric Energy Density		381Wh/l
Gravimetric Energy Density		174Wh/kg

Discharged State after Assembling

\*The maximum thickness of the standard shipment charging condition

\*When designing a battery pack, get the precise information on a cell battery drawing