


Rechargeable Sealed Lead-Acid Battery

LB-VWVBF2

12 Volt 2.0 Amp Hours.

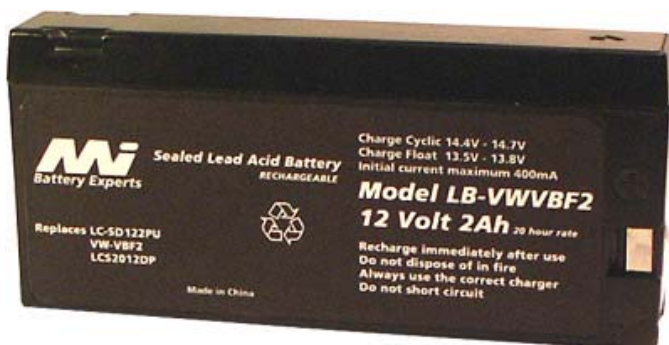

Features:

- Absorbent Glass Mat (AGM) technology for superior performance.
- Valve regulated, spill proof construction allows safe operation in any position.
- Power/volume ratio yielding unrivaled energy density.
- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified.
- U.L. recognized under file number MH 20845.




PERFORMANCE SPECIFICATIONS


Nominal Voltage.....	12 volts (6 cells in series)
Nominal Capacity	
20 hour rate (100mA to 10.50 volts)	2.00 A.H.
10 hour rate (190mA to 10.50 volts)	1.90 A.H.
5 hour rate (340mA to 10.20 volts)	1.70 A.H.
1 hour rate (3.92A to 9.00 volts)	1.24 A.H.
15 min. rate (3.33A to 9.00 volts)	0.98 A.H.
Approximate Weight.....	0.60kg (1.32 pounds)
Energy Density (20 hour rate).....	1.77 Watt-hours/cubic inch (107.6 Watt-hours/l)
Specific Energy (20 hour rate).....	18.2 Watt-hours/pound (40.0 Watt-hours/kg)
Internal Resistance (Fully Charged Battery).....	105 milliohms (approximately)
Maximum Discharge Current (≤ 7 Min.).....	6.0 amperes
Maximum Short-Duration Discharge Current (≤ 10 Sec.).....	n/a - battery is fused
Terminals.....	Pressure Contacts
Shelf Life — % of nominal capacity at 68° F (20° C)	
1 Month.....	97%
3 Months.....	91%
6 Months.....	83%
Operating Temperature Range	
Charge.....	-4°F (-20°C) to 122°F (50°C)
Discharge.....	-4°F (-20°C) to 140°F (60°C)
Case.....	ABS Plastic

TECHNICAL DATA:


Shelf Life and Storage

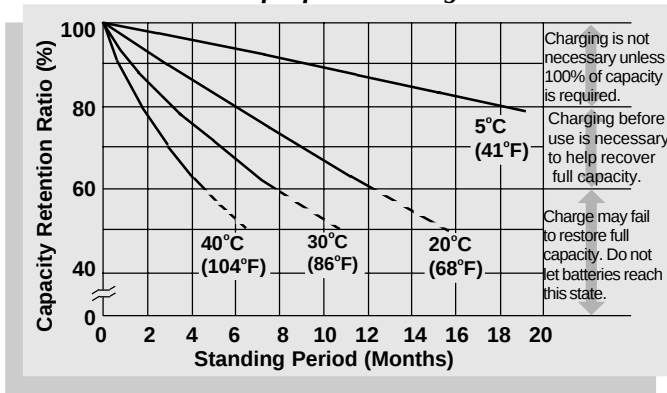

Life Characteristics in Stand-By Use

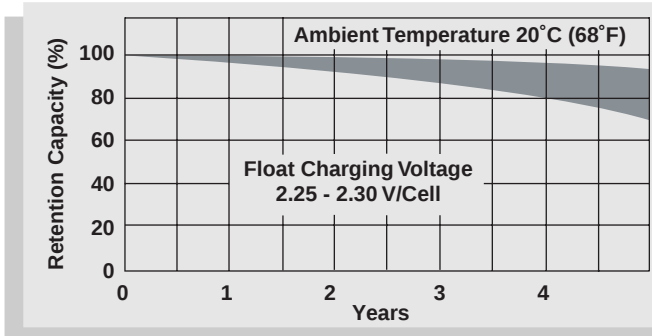

Life Characteristics in Cyclic Use

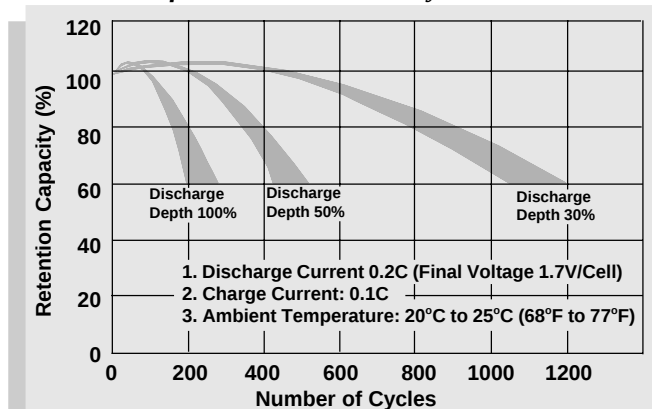


CHARGING

Cycle Applications: Limit initial current to 400mA. Charge until battery voltage (under charge) reaches 14.40 to 14.70 volts at 68°F (20°C). Hold at 14.40 to 14.70 volts until current drops to approximately 20mA. Battery is fully charged under these conditions, and charger should either be disconnected or switched to "float" voltage.


"Float" or "Stand-By" Service: Hold battery across constant voltage source of 13.50 to 13.80 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

NOTE: Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged after 6-9 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

Discharge Characteristics

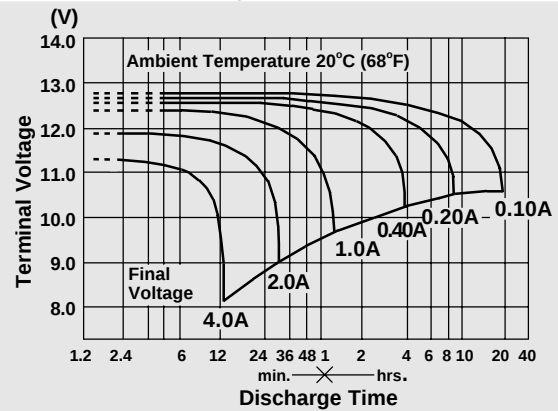


Discharge Time vs. Discharge Current

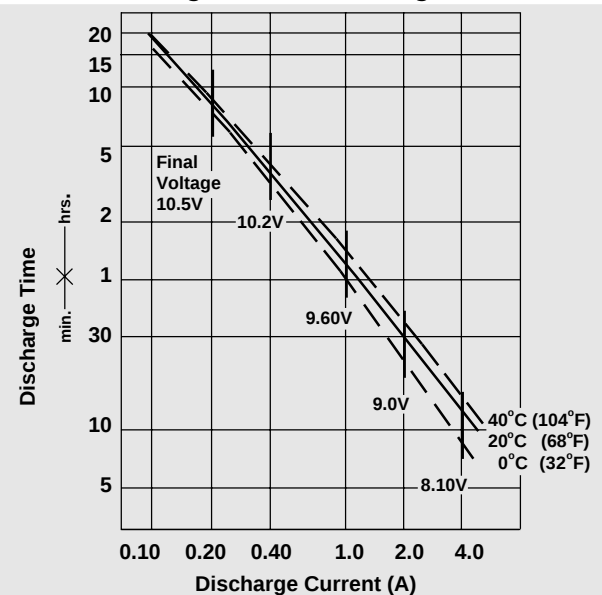

Physical Dimensions: in. (mm)

Terminals: PC (mm)

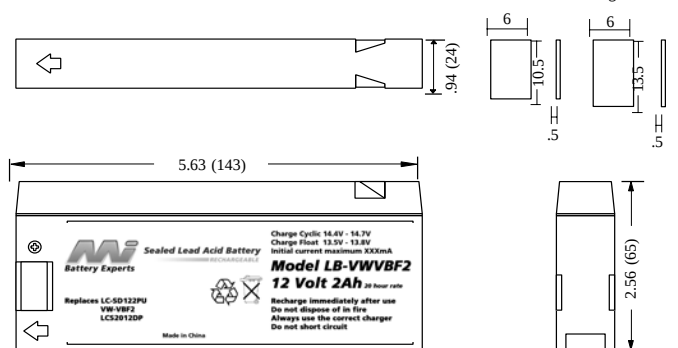

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.

Mi
Battery Experts

RECHARGEABLE

www.batteryexperts.com.au