





anber rock



The same capacity but smaller volume



Two connection modes

The same design language for handling and upper cover molding New power management support charging and discharging simultaneously




on the top



on the bottom

Instructions Amber Rock

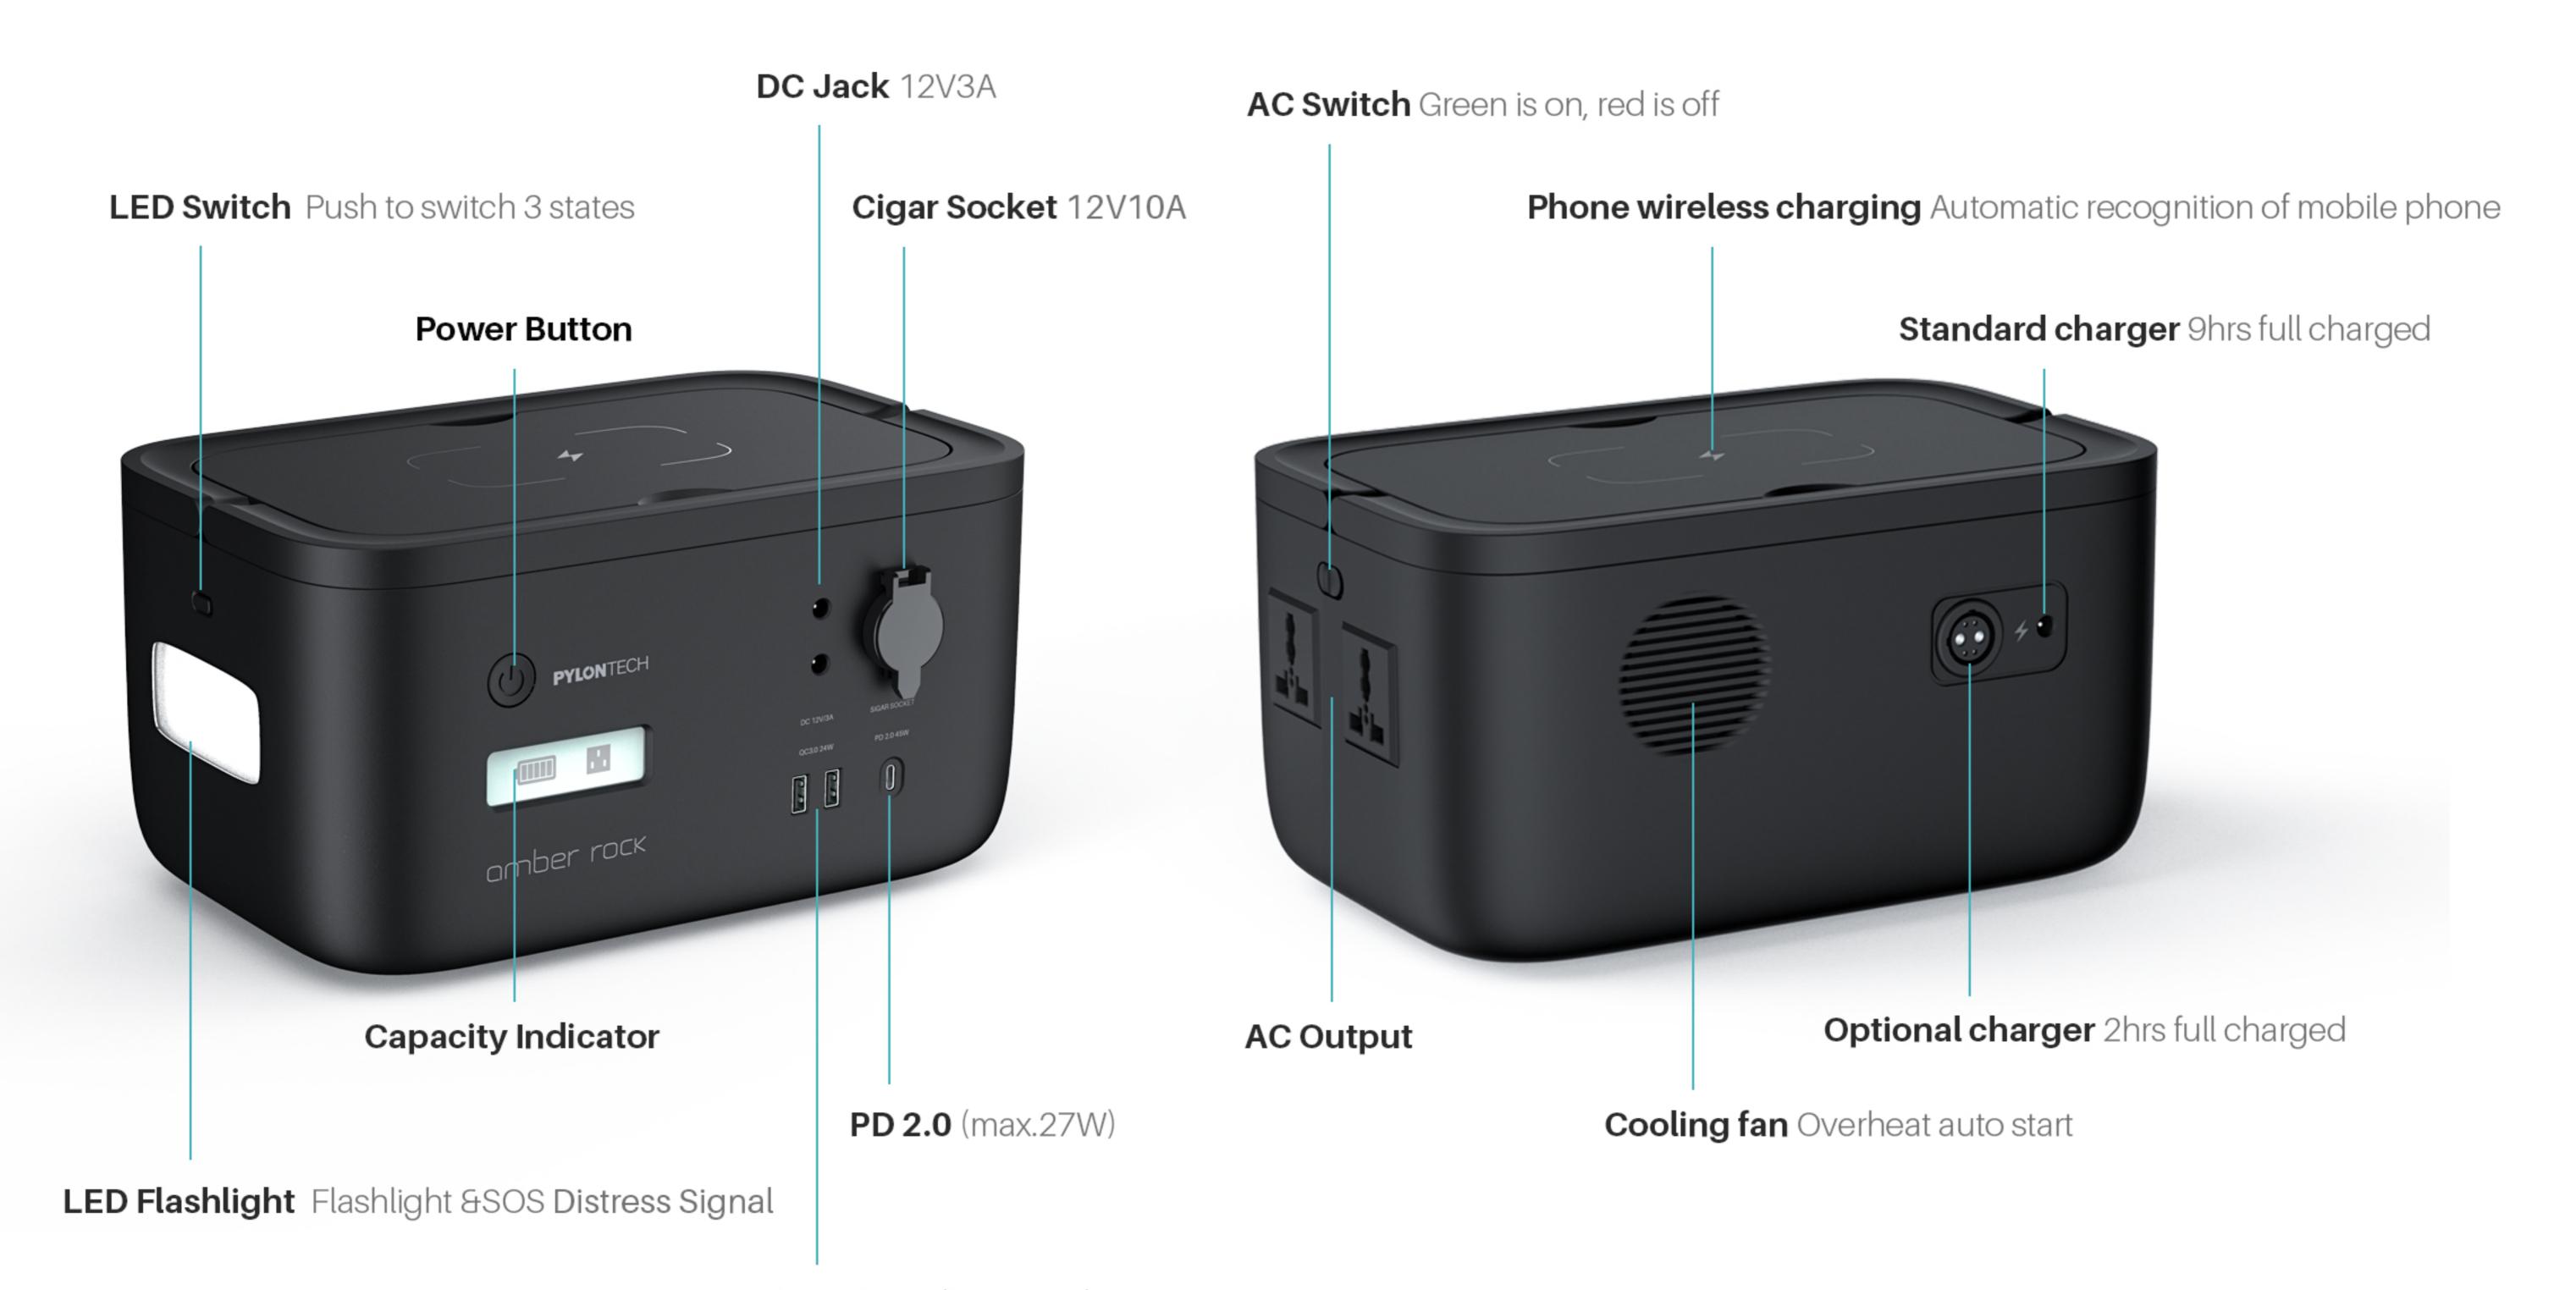

USB QC2.0/3.0 (max.24W)

Instructions Amber Rock




Application



enpowering your life when you go camping or on a caravan holiday



During natural Hazard period, amber rock will be the warm of the life.

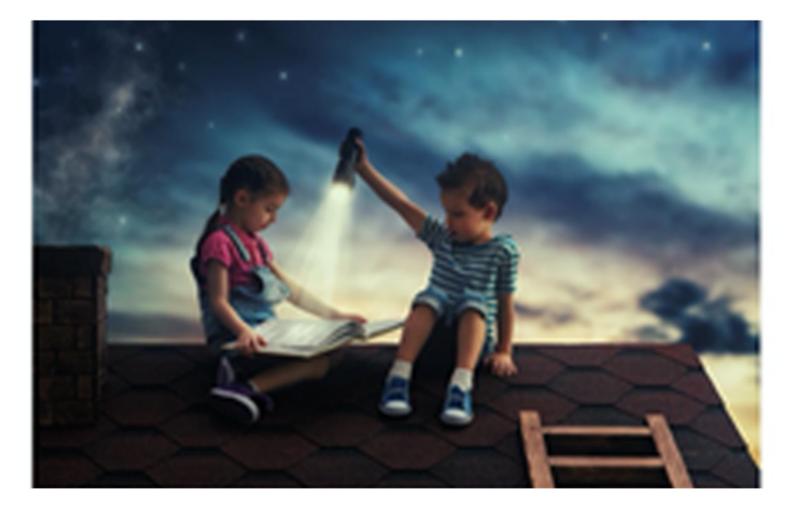

Brin light and hope to the off grid region



Outdoor Activity Any time Any place

Nominal Capacity: LFP 473WH

Shelf Temperature: -20~60 °C

Gross Weight: 3.5kg

Specification Amber Rock

Basic Information

Product Name: AR500 Dimension: 303*198*161 Operation Temperature: -15-45 °C

Electrical Information

Output

2 ports USB QC3.0 12V2A (max.24W)
1 port PDC2.0 (max.27W)
1 port 12VDC/10A
2 ports DC jack 3A (size Φ6.4-2.0)
2 ports 100V/110V/120V±5% 60HZ

Nominal Capacity: LFP 473WH Gross Weight: 6.4kg

Shelf Temperature: -20~60 °C

Input

9hrs full charged -standard charger 2hrs full charged- optional charger

Specification Amber Mini

Basic Information

Product Name: ARmini
Dimension: 303*198*108
Operation Temperature: -15~45 °C

Electrical Information

Output

1 ports USB QC3.0 12V2A (max.24W) 1 port PDC2.0 (max.27W)

Input

9hrs full charged -standard charger 2hrs full charged- optional charger

You can power for...

