

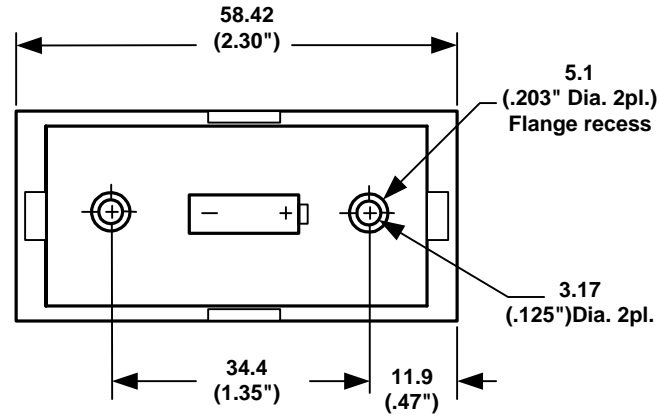
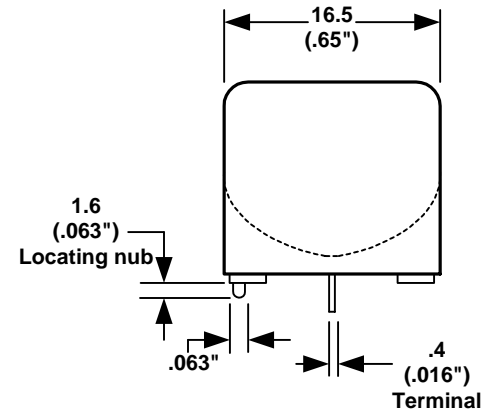


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.

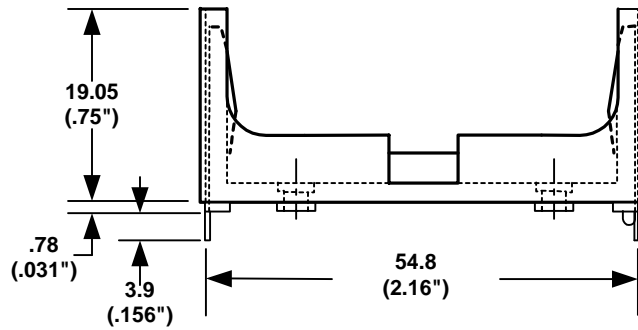

Standard Pc Version P.C. Board Hole layout

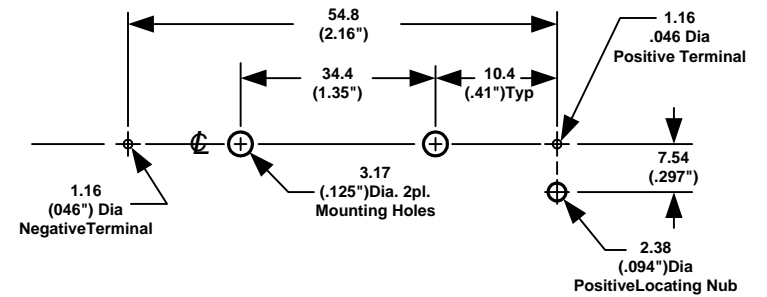

**SPECIFICATIONS**

**Material:**

Holder  
 Flammability Rating  
 Dielectric Strength  
 Temperature Range  
 Resistance to Solvent

Self extinguishing thermoplastic, PBT, black  
 UL94 V-O, File No. E88499 (M)  
 560 volts/ mil at 25°C for 5 sec.  
 -55°C to 180°C.  
 Xylene, Ethyl, Butyl, Methyl, Propyl alcohol,  
 Ethyl acetate, Refrigerants, Heptane & Toluene.  
 302 Spring Tempered Stainless Steel Nickel Plated  
 18 Grams

Contacts  
 Weight


**NOTE:**

Eyelet Stimpson Style # A1883 .110"OD. x .190"flange  
 Flange recess .203" Dia. X .090" deep  
 Accepts standard 2-56 machine screws

**Accessories:**

BI - UM - 3 - 4 Insulator,

**Note:** Dimensions in mm. ( inches )

TOLERANCES (EXCEPT AS NOTED)	 <b>Memory Protection Devices, Inc.</b> 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL + .5 (.020) - .5 (.020)	SCALE	DRAWN BY B.S.
FRACTIONAL + .8 (.030) - .8 (.030)	APPROVED BY	
ANGULAR + 3° - 3°	DATE 11/03/01	DRAWING NUMBER BHAA