

PCB LAYOUT




Date	SYM	REVISION RECORD	AUTH	DR.	CK.

#55(ϕ .052) Drill 2PL \oplus (-)Neg Term.

.787 [20.00]

\oplus (+)Pos Term.

ϕ 1.13[ϕ 28.80]

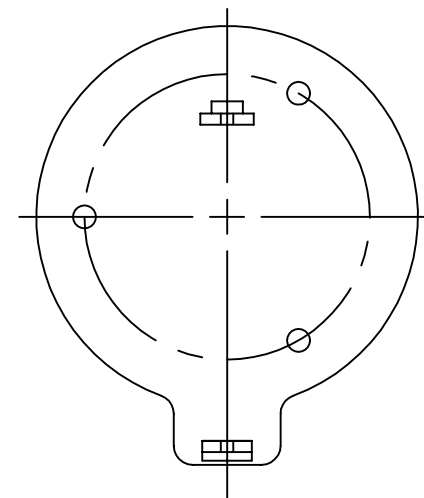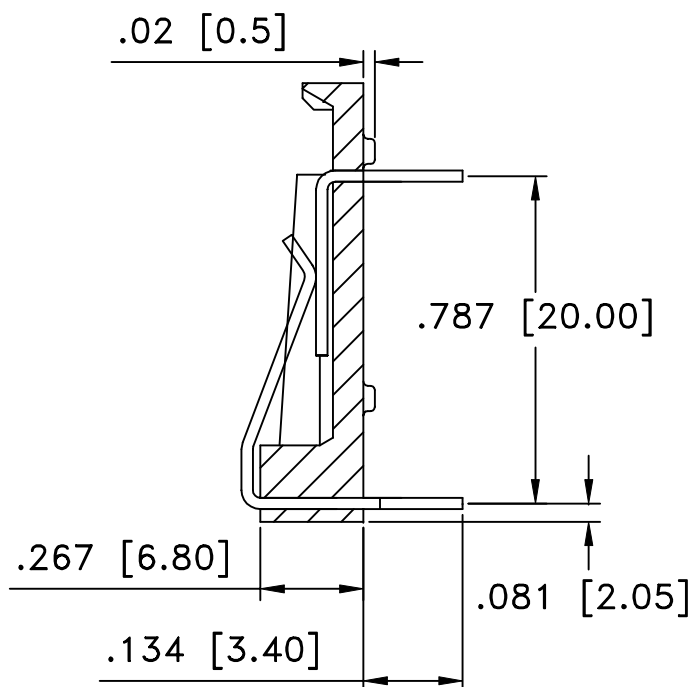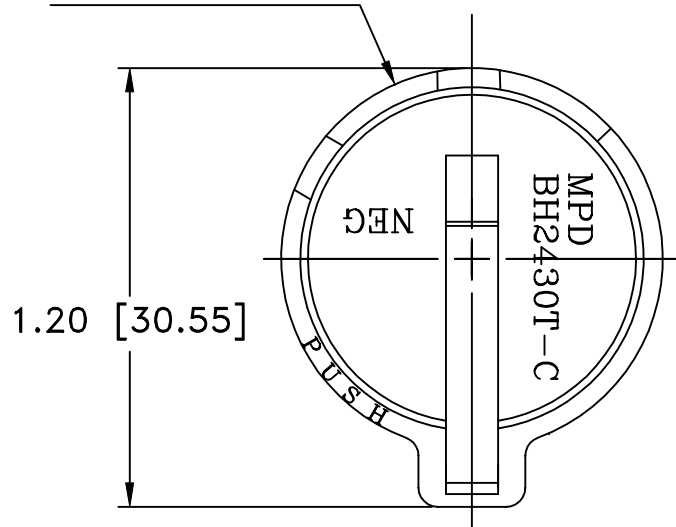

SPECIFICATIONS


*Holder material- Black PBT

*Flammability rating-UL94V-0

*Contacts :

Positive: 0.020" thick PHOS-BRONZE, Nickel Pltd.

Negative: 0.020" thick spring tempered Stainless Steel, Nickel Pltd.

Tolerance (Except as noted)	 Memory protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal \pm .5 (.020)	Scale		Drawn By B.S.
Fractional \pm .8 (.030)	Title BATTERY HOLDER		Approved By T.B.
Angular \pm 3°	Date 12/07/02	Drawing Number BH2430T-C	