
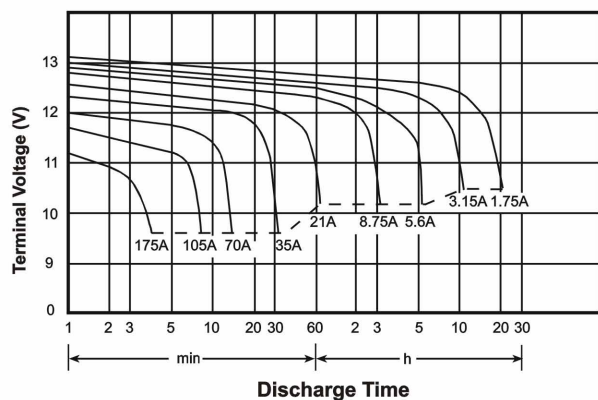


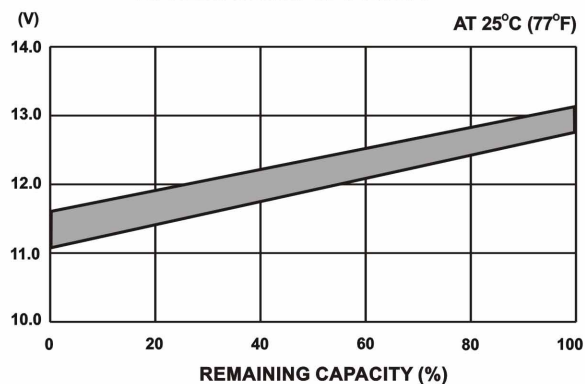


NON-SPILLABLE SEALED RECHARGEABLE BATTERY

NP35-12GN 12V, 35.0Ah

☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 12V	● CAPACITY 25 °C / 77 °F
● NOMINAL CAPACITY(20 hrs) : 35Ah	20 hr @ 1.75 A : 35 Ah
● DIMENSIONS	10 hr @ 0.315 A : 31.5 Ah
TOTAL HEIGHT : 170 mm (6.69 inches)	5 hr @ 5.6 A : 28 Ah
CONTAINER HEIGHT : 170 mm (6.69 inches)	1 hr @ 21 A : 21 Ah
LENGTH : 198 mm (7.80 inches)	1 C @ 35 A : 17.5 Ah
WIDTH : 132 mm (5.20 inches)	● INTERNAL RESISTANCE(25°C , 77 °F) : 12 mΩ
WEIGHT : APPROX 12.60 kg (27.78 lbs)	● CHARGING VOLTAGE (25°C , 77 °F)
● MAX DISCHARGE CURRENT : 280A (5 sec)	STANDBY USE : 2.275±0.025 V/CELL
● MAX SHORT- DURATION DISCHARGE CURRENT : 700 A(0.1 sec)	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS : RT-01/FP-23	CYCLE USE : 2.45±0.05 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-5 mV / °C / CELL)
	● MAX CHARGING CURRENT : 10.5 A

Discharge Characteristics 25 °C (77 °F)**OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY**

☆ Dimensions

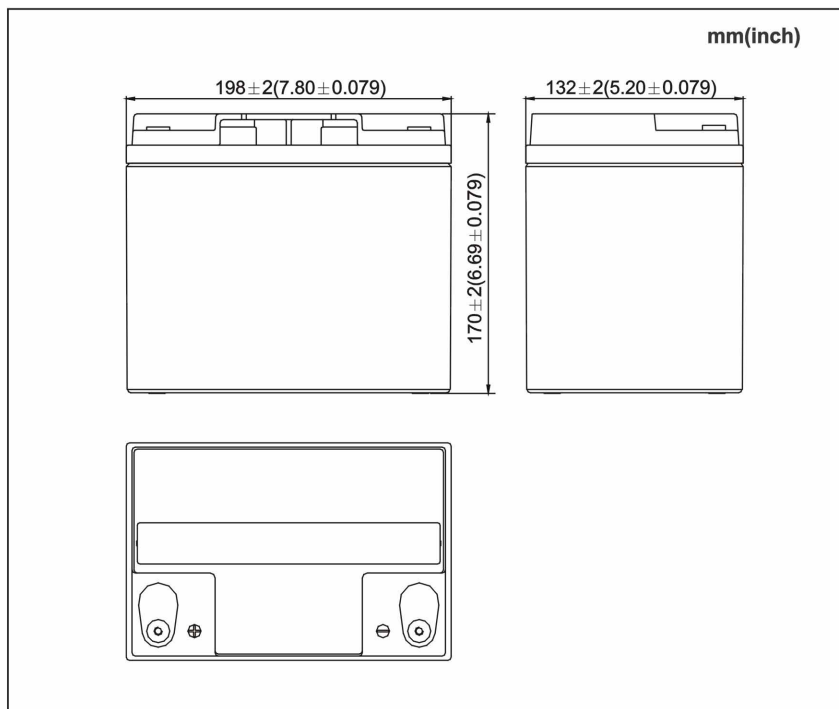

☆ Terminal

