

Drypower Gel

HYBRID GEL TYPE
DEEP CYCLE POWER

GEL

12V

12Ah

SLA

GEL
Deep Cycle

12GB12C

Rechargeable Hybrid Gel Lead Acid Battery

SPECIFICATIONS

Nominal Voltage	12V	
Nominal Capacity		
20 hour rate (0.60A to 10.50V)	12Ah	
5 hour rate (2.04A to 10.20V)	10.2Ah	
1 hour rate (6.6A to 9.60V)	6.6Ah	
1C (12A to 9.60V)	6.4Ah	
Weight	Approx. 4.03kg	
Internal Resistance (at 1KHz)	Approx. 13mΩ	
Maximum Discharge Current (5 secs)	180A	
Charge Methods at 25°C		
Cycle Use		
Charging Voltage	13.8V to 14.4V	
Coefficient	-5.0mV/°C/Cell	
Maximum Charging Current	3.6A	
Standby Use		
Float Charging Voltage	13.5V to 13.8V	
Coefficient	-3.0mV/°C/Cell	
Operating Temperature Range		
Charge	-15°C to 40°C	
Discharge	-15°C to 50°C	
Storage	-15°C to 40°C	
Charge Retention (Shelf Life) at 20°C		
1 month	92%	
3 months	90%	
6 months	80%	

Case Material	ABS UL94 HB
Termination	F2 (Faston Tab 250)

Classified as a non-spillable battery.
Approved for transportation by:

- Air (IATA/ICAO provision A67)
- Road
- Sea (per IMDG Special Provision 238)



Barcode




9319632520024




DIMENSIONS

mm (inch)

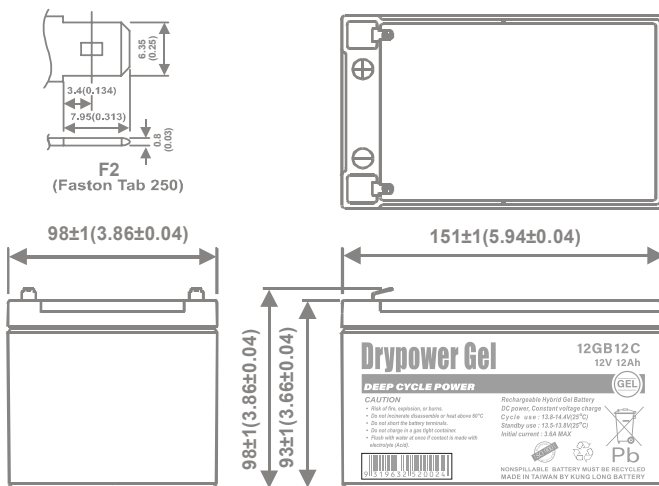


(V)
FOR 12V
BATTERY

Discharge Time VS. Discharge Current (25°C)

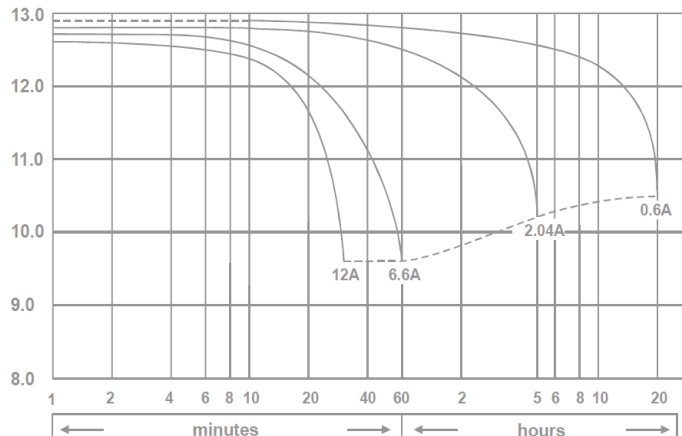


CHARACTERISTICS CHARTS


Effect of Temperature on Capacity 25°C(77°F)

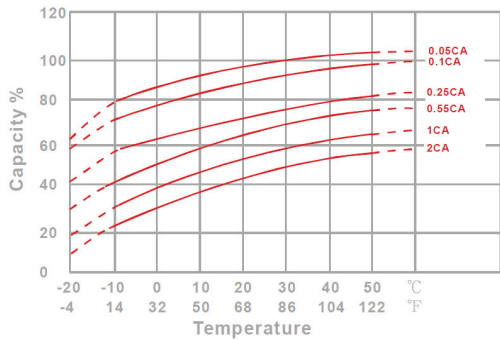


Capacity Retention Characteristic

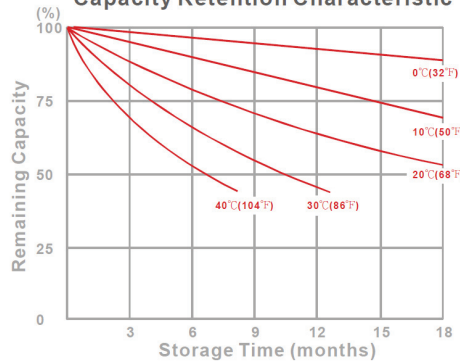

Cycle Service Life

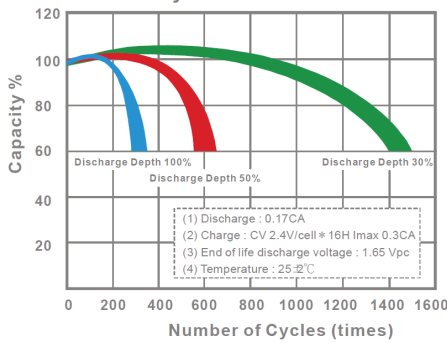

Trickle (or float) Service Life



FEATURES & BENEFITS

- ◆ Industry leading 99.99% pure lead content for superior service life and dependable performance.
- ◆ Gel compound contains more electrolyte that is more evenly distributed across the battery, producing stable output throughout its service life, minimising sulphation and significantly improving standby life.
- ◆ Low internal resistance for optimum charge and discharge efficiency.
- ◆ Maintenance free technology and non-spillable design.
- ◆ Better suited for more extreme operating temperatures.
- ◆ Manufactured by Kung Long Battery (KLB) at facilities in Taiwan and Vietnam. KLB is a leading manufacturer and complies with relevant international quality standards including ISO9001, CE ETL9000, UL1989, OHSAS18001 and ISO17025. KLB supports Green Sustainable supply chain practices.



PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	367	416	446	468	479	490	509
10	min	243	278	302	320	329	332	341
15	min	167	205	229	248	253	259	265
30	min	101	118	131	140	143	146	149
60	min	78.4	84.5	87.7	89.6	90.4	91.1	92
120	min	45.5	48.2	49.9	51.4	51.9	52.5	53.2
180	min	31.5	33.6	35.1	36.3	36.7	37.2	37.7
240	min	26.2	27.7	28.9	29.8	30.2	30.6	31.1
300	min	23.3	24.2	24.9	25.6	25.90	26.2	26.6
600	min	13.4	13.9	14.3	14.7	14.80	15	15.2
1200	min	6.79	7.06	7.29	7.59	7.68	7.77	7.94

Discharge Rates in Amperes to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	32.6	38.4	42.1	45.1	46.4	47.7	50.3
10	min	20.9	24.3	26.6	28.5	29.1	29.6	30.4
15	min	18.2	19.6	20.8	21.7	22	22.3	22.9
30	min	10.9	11.7	12.1	12.5	12.6	12.8	13
60	min	7.02	7.53	7.76	7.97	8.05	8.12	8.21
120	min	3.63	3.92	4.1	4.25	4.31	4.36	4.42
180	min	2.57	2.78	2.94	3.05	3.09	3.13	3.18
240	min	2.09	2.27	2.39	2.46	2.49	2.52	2.56
300	min	1.92	2	2.06	2.11	2.13	2.16	2.2
600	min	1.09	1.14	1.18	1.21	1.22	1.24	1.26
1200	min	0.574	0.598	0.621	0.636	0.642	0.649	0.65

All data on the spec. sheet is an average value:

The tolerance range : X < 6min (+15%~-15%), 6min ≤ X < 10min (+12%~-12%), 10min ≤ X < 60min (+8%~-8%), X ≥ 60min (+5%~-5%)

Aug2020

Performance may vary depending on application. All specifications are correct at time of creation. All specifications and operation conditions contained in this datasheet are subject to change or improvement without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us.