



東莞市福洋電子有限公司
Fuyuan Electronics Co.,Ltd

電話Tel:0769 86595029 89613899 傳真Fax:0769 86595019 網址Http:WWW.DGFUYUAN.CN 郵箱E-mail:BELINDA@DGFUYUAN.CN

產 品 確 認 書

PRODUCT FOR APPROVAL

客 戶
CUSTOMER: M A S T E R

發 行 日 期
ISSUE DATE: 2015年3月4日

品 名
ARTICLE: S W I T C H I N G P O W E R S U P P L Y

規 格
SIZE: 100-240V A C 12V D C 2A

標 準
STANDARD: S A A

標 準 編 號
DESCRIPTION: F Y 1202000

客 戶 料 號
CUSTOMER NO:

本 廠 型 號
OUR MODEL NO: F Y -16550-A D T

顏 色
COLOR: 黑 色 B L A C K

製 作 PREPARED BY	審 核 APPROVED BY	確 認 APPROVAL BY
陳水清	黃成	

請將產品確認書簽回本公司
P L E A S E S I G N B A C K

SPECIFICATION 規格

1.0 THIS SPECIFICATION SUBJECT TO APPLICATION SAFETY STANDARD : AS60950 AS61347

CONDUCTED OF EMI CISPR22 CLASS OF INSULATION B

本規格追溯至安全標準 AS60950 AS61347 電磁兼容 CISPR22 絕緣等級 B

2.0 MECHANICAL CHARACTERISTICS 機械特性:

2.1 STRAIN RELIEF TEST : EACH TERMINAL OF THE PRODUCT SHALL BE CAPABLE OF

WITHSTANDING AN AXIAL PULL OF 2 KG APPLIED GRADUALLY AND MAINTAINED FOR ,
60 SECONDS , WITHOUT LOOSENING , BREAKING OR OTHER DAMAGE .

應力測試: 產品每個引線端子可以承受的軸向拉力為 2 千克, 持續時間 60 秒,
無松脫, 阻斷, 或其它損壞現象.

2.2 DROP TEST : PRODUCTS SHALL BY DROPPED FORM A HEIGHT OF 90 CM , ONTO A DRY

WOOD SURFACE , ITS THICKNESS IS 1 CM , AFTER SHALL NO ABNORMAL CONDITION
HAPPEN , AND INSULATION TEST 10 MΩ MIN .

跌落試驗: 產品自高度為 90 CM , 跌落在厚度為 1 CM 松木板面后, 無異常, 絕緣電阻測試 , 最小 10M 歐姆.

2.3 CORD BENDING TEST: THE CORD SHALL WITHSTAND A WEIGHT OF 200 GM , IT SWINGS FROM

LEFT TO RIGHT AT AN ANGLE OF 120 DEGREE (TOTAL) 300 TIMES , CORD BE CONDUCTIBLE

電線搖擺試驗: 電線吊重 200 克, 左右擺動角度 120 度, 300 回合后仍須導通 .

3.0 GENERAL APPEARANCE : THE GENERAL APPEARANCE OF THE PRODUCT SHALL BY ACCEPTABLE

WITHOUT DEFORMATION , CRACKS OR CORROSION .

外觀: 產品一般外觀為, 接受沒有變形, 裂縫和鏽蝕.

4.0 INPUT VOLTAGE 輸入電壓

PLUG	MINIMUM	NORMAL	MAXIMUM
	100VAC 50/60Hz	240VAC 50/60Hz	264VAC 50/60Hz

4.1 OUTPUT VOLTAGE 輸出電壓

PLUG	LOADING	NO LOAD	RIPPLE
	12VDC 2A ±5%	12VDC±5%	120mV _{p-p} MAX

4.2. INPUT CURRENT 輸入電流

	AC 100V 50/60Hz	AC 240V 50/60Hz	AC 264V 50/60Hz
NO LOAD		50mA Max	
LOADING		400mA Max	

4.3 INPUT POWER :NO LOAD 0.5 W MAX , AT INPUT 100-240 VAC 50/60 Hz .
LOADING 30 W MAX , AT RATED OUTPUT .

輸入功率 :空載 0.5 W 最大 , 在輸入電壓 100-240 VAC 50/60 Hz .
負載(I1) 30 W 最大

4.4 EFFICIENCY 效率: 80 % MIN. AT RATED INPUT AND OUTPUT

4.5 TEMPERATURE 溫升: CASE 65 °C MAX . FOR RATED OUTPUT

4.6 INSULATION RESISTANCE 絕緣電阻: 500 VDC 100 MΩ MIN .

4.7 DIELECTRIC WITHSTAND TEST : 5mA 3000 VAC FOR 60 SECOND BETWEEN INPUT AND OUTPUT
INPUT AND CASE, AT AN ALTERNATIVE POTENTIALS 5% HIGHER MAY BE APPLIED FOR 1 SECOND .

耐壓測試 : 5mA 3000 VAC 時間1分鐘 , 在輸入和輸出 , 輸入和外殼之間 , 時間1分鐘 ,
在選擇提高耐壓5%時 , 應用時間為1秒 .

4.8 INRUSH CURRENT 沖擊電流: PEAK INRUSH CURRENT SHALL BE LIMITED 15A FOR A COLD START

4.9 POWER FACTOR 功率因數: ---- MIN.

5.0 ENVIRONMENTAL環境:

5.1 OPERATING TEMPERATURE RANGE : THE OPERATING TEMPERATURE OF THE PRODUCT SHALL BE
FROM -29 °C TO + 45.5 °C .

工作環境溫度範圍 : -29 °C TO + 45.5 °C .

5.2 STORAGE TEMPERATURE RANGE : THE STORAGE TEMPERATURE OF THE PRODUCT SHALL BE
FROM -40 °C TO + 75 °C .

儲存環境溫度範圍 : -40 °C TO + 75 °C .

5.3 RESISTANCE TO HEAT: WHEN TESTED WITHIN 10 MINUTES AFTER PRODUCT HAS BEEN PLACED IN
A TEST CHAMBER MAINTAINED AT 105 °C ±3 °C FOR 16 HOURS , THE PRODUCT SHALL COMPLY
WITH THE REQUIREMENTS OF 4.7 , DIELECTRIC WITHSTAND TEST , SHALL HAVE INSULATION
RESISTANCES NOT LESS THAN STATED BELOW AS MEASURED AT 500VDC 10 MEGOHMS MINIMUM
BETWEEN THE INPUT AND THE OUTPUT, INPUT AND CASE TOGETHER , 10 MEGOHMS MINIMUM .

耐熱 : 經測試后的產品 , 放置在 105 °C ±3 °C . 高溫箱內 , 經過16小時后 , 進行測試 , 產品必須符合 4.7項耐壓
測試要求 , 絕緣電阻 : 500VDC 不少於10M 歐姆 , 在輸入和輸出 , 輸入和外殼之間 .

5.4 RESISTANCE TO MOISTURE : THE PRODUCT SHALL BY PLACED IN A TEST CHAMBER MAINTAINED AT $40\text{ }^{\circ}\text{C}\pm 2\text{ }^{\circ}\text{C}$ AT 90% ~ 95% RELATIVE HUMIDITY FOR 6 HOURS . THEN , WHEN TESTING 10 MINUTES SAFTER THE PRODUCT IS TAKEN OUT FROM THE TEST CHAMBER AND WIPED DRY , THE PRODUCT SHALL COMPLY WITH THE REQUIREMENTS OF 4.7 , DIELECTRIC WHITHSTAND TEST , AND SHALL HAVE INSULATION RESISTANCE NOTLESS THAN STATED BELOW AS MEASURED AT 500VDC 10 MEGOHMS MINIMUM BETWEEN THE INPUT AND THE OUTPUT TOGETHER ;

10 MEGOHMS MINIMUM BETWEEN A SECONDRY THER SECONDRY AND TOGETHER

耐濕性: 在環境溫度為 $40\text{ }^{\circ}\text{C}\pm 2\text{ }^{\circ}\text{C}$ 相對濕度為 90% ~ 95% 條件下放置 6 小時,取出 10 分分鐘后進行測試, 產品需滿足 4.7項耐壓要求,絕緣電阻 輸入對輸出 ,在500VDC 條件下, 最小 10M 歐姆.

6.0 RELIABILITY:THEVDESIGN AND CONSTRUCTION OF THIS PRODUCT EXHIBIT A MINIMUM MEAN TIME BETWEEN FAILURE OF 30000 HOURS FULL RATED LOAD OPERATION AT $25\text{ }^{\circ}\text{C}$.

可靠性: 額定全負載 ,操作溫度 $25\text{ }^{\circ}\text{C}$. 產品壽命在 30000 小時內 .

7.0 PROTECTION 保護:

7.1 THE PRODCT INCLUDES CURRENT FUSE TYPE 250V 2A LOCATED WITHIN INPUT CIRCUIT.

電流保護: 產品內置一個電流保險絲 ,類型為 250V 2A , 固定在輸入回路中 .

7.2 SHORT CIRCUIT: CAPABLE OF WITHSTANDING CONTINUOUS SHORT CIRCUIT AND RECOVER AUTOMATICALLY

短路保護: 具有耐持續短路和自動恢復能力.

8.0 INSPECTION 檢查:

8.1 100% INSPECTION ITEMS : THE ITEMS OF 100% INSPECTION SHALL BE : NO-LOAD VOLTAGE ;LOAD VOLTAGE ; RIPPLE VOLTAGE; INPUT CURRENT ; DIELECTRIC WITHSTAND TEST; AND GENERAL APPEARANCE .

100% 檢查項目 : 空載電壓 , 負載電壓 , 紋波電壓 , 輸入電流 , 耐壓測試和普通外觀檢查 .

8.2 THE SAMPLING INSPECTION ITEMS :THE ITEMS OF SAMPLING INSPECTION SHALL IN ADDITION TO THE 100% INSPECTION ITEMS , INCLUDE : INSULATION RESISTANCE ; AND AUDIBLE SOUND CHECK .

抽樣檢查除100% 檢查項目外 , 還包括絕緣電阻和听得見的聲音檢查 .

8.3 THE SAMPLING INSPECTION DATA ACCORDING TO 8.2 AND 100% DIELECTRIC WITHSTAND TEST DATA SHALL BE SUBMITTED FOR EACH LOT .




遞交每批抽樣檢查報告和100%耐壓測試報告.

8.4 THE SAMPLING INSPECTION ITEMS LEVEL : MIL-STD-105D II AQL : CRI 0 ; MAJ 0.25 ; MIN 2.5

抽樣檢查項目水平 : M IL-STD -105D 致命缺點0 , 主要缺點0.25 , 次要缺點2.5 .

MECHANICAL DIMENSIONS

UNIT:MM

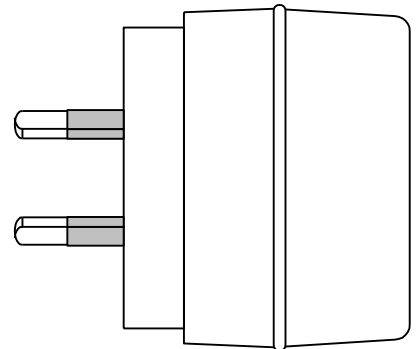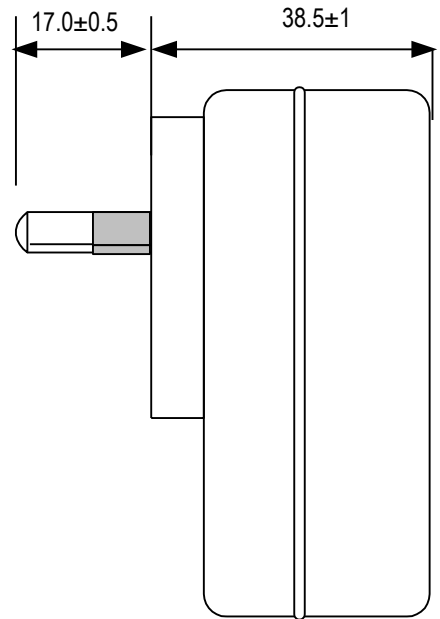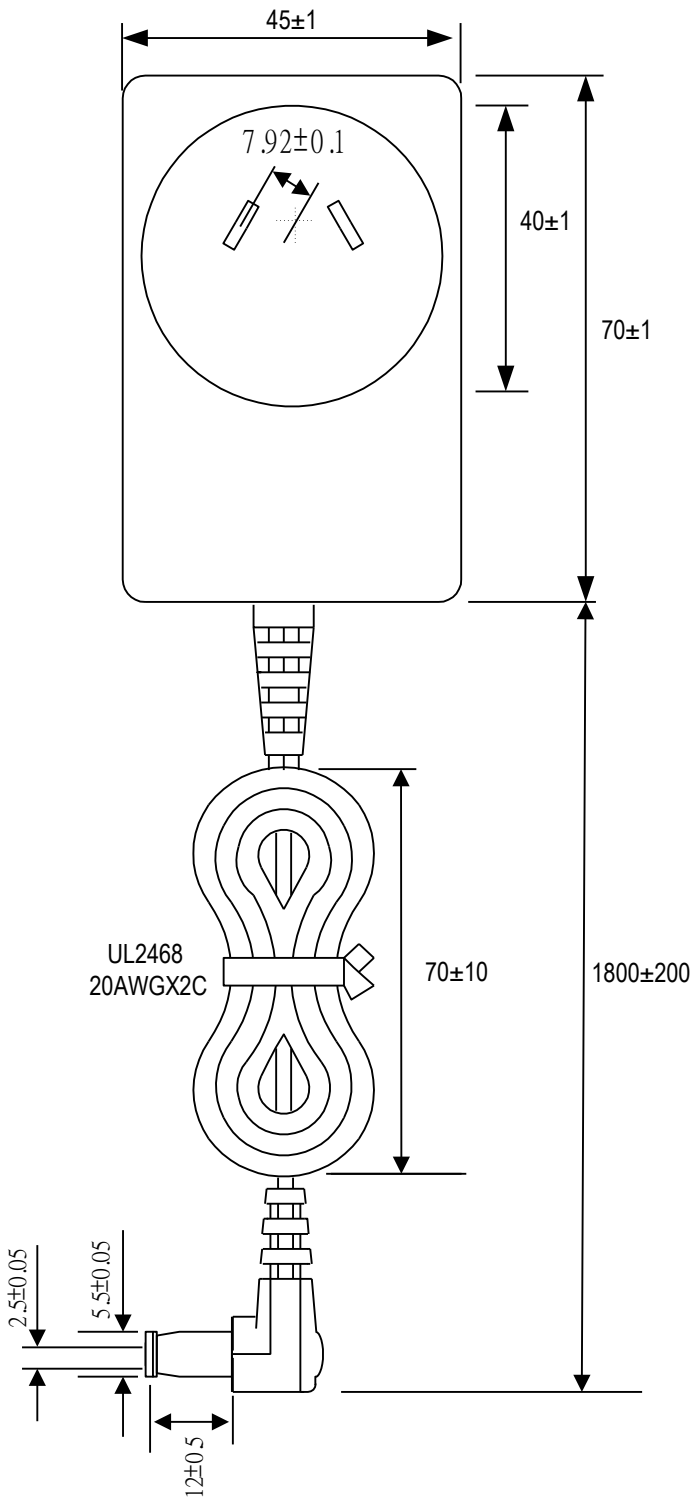

Fuyuang

SWITCHING POWER SUPPLY
MODEL: FY1202000
INPUT: AC 100-240V 50/60Hz 0.4A
OUTPUT: DC 12V 2A
MADE IN CHINA

Queensland Government
Department of Industrial Relations
APP NO. Q061232 N17653
SAA130561EA C-TICK/N136

EFFICIENCY

CE

CAUTION
RISK OF ELECTRIC SHOCK
DRY LOCATION USE ONLY