





PCM for 10.8/11.1V Lilon Battery Pack

SPECIFICATIONS

No.	Test Item	Criterion	
1	Voltage	Charging voltage	DC:12.6V CC/CV
		Balance voltage for single cell	N/A
2	Current	Balance current for single cell	N/A
		Low Current consumption for single cell	≤50μA
		Maximal continuous Discharging current	2A
3	Over Charge Protection	Over charge detection voltage	4.35V±0.025V
		Over charge detection delay time	0.5S—1.5S
		Over charge release voltage	4.15V±0.05V
4	Over Discharge Protection	Over discharge detection voltage	2.40V±0.08V
		Over discharge detection delay time	50—150ms
		Over discharge release voltage	3.0±0.10V
5	Over Current Protection	Over current detection voltage	200±25mv
		Over current detection current	5±0.5A
		Detection delay time	5ms—15ms
		Release condition	Cut load
6	Short Protection	Detection condition	Exterior short circuit
		Detection delay time	200-500us
		Release condition	Cut load
7	Resistance	Protection circuitry	≤60mΩ
8	Temperature	Operating Temperature Range	-40~+85°C
		Storage Temperature Range	-40~+125°C
9	Dimensions	L 30.0mm x W 10.0mm x T 3.0mm	

LAYOUT DIAGRAM

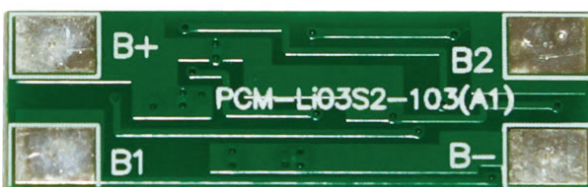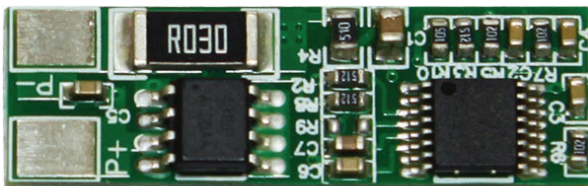

CONNECTION DIAGRAM

