

## Li/SOCl<sub>2</sub> Battery: ER26500H

### Technical data

- Nominal capacity : 8.5Ah
- Nominal voltage : 3.6V
- Max. continuous current : 100mA
- Max. pulse current : 200mA
- Standard discharge current : 2mA
- Working temperature range : -55 °C ~+85 °C
- Weight : 48.5g

 UL. Component Recognition( MH46165 )

### Applications

- Smart meter
- Security devices
- IoT devices




International size reference : C


### Features & Benefits

- Superior long-term reliability
- Low self-discharge rate
- High safety and energy density


Typical discharge curves at 23°C

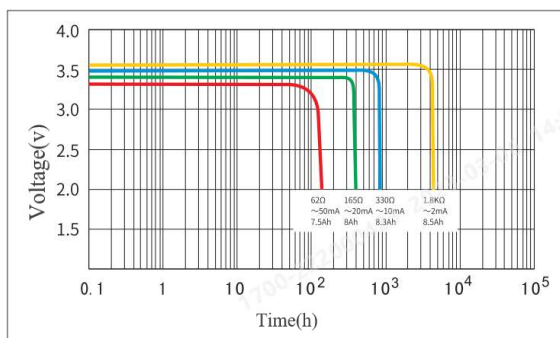


Voltage vs. Temperature

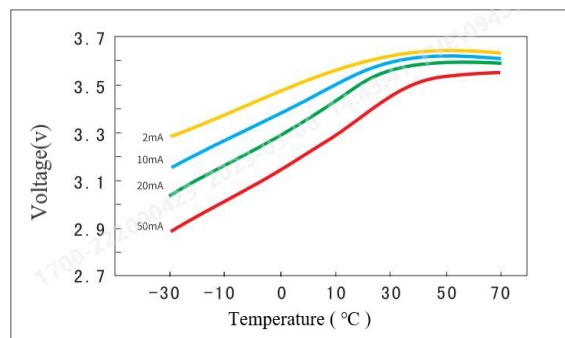

Capacity vs. Current (2V cut-off)

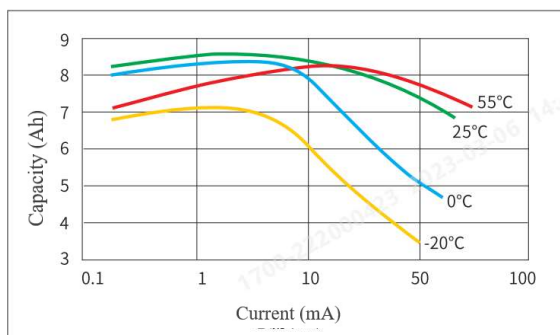

Storage characteristics

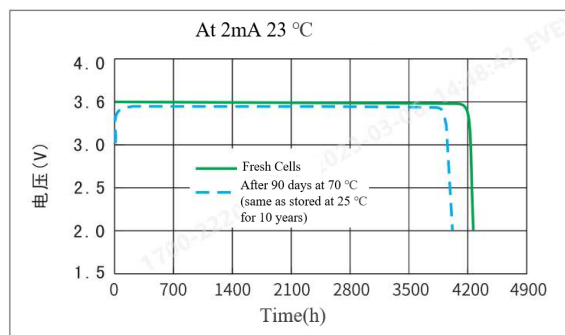

#### WARNING:

Fire, explosion and severe burn hazard. Do not recharge, crush, disassemble, heat above 100°C (212°F), incinerate or expose contents to water.  
Do not solder directly to the cell, use tabbed cell instead.

#### ATTENTION:

Consult FANSO when using batteries at temperature exceeding the -10 °C ~ +40 °C range. "The above data comes from FANSO's laboratory, any representations in this document concerning performance are for informational purpose only. FANSO Technology Co., Ltd reserves the right to interpret this data."



Official website  
Issued in Feb. 2023