# 12SB36TL

**Rechargeable AGM Sealed Lead Acid Battery** 

SPECIFICATIONS		
Nominal Voltage		12V
Nominal Capacity		
20 hour rate	(1.80A to 10.50V)	36Ah
10 hour rate	(3.42A to 10.50V)	34.2Ah
5 hour rate	(6.12A to 10.20V)	30.6Ah
1C	(36A to 9.60V)	22.8Ah
3C	(108A to 9.60V)	14.4Ah

Weight Approx. 11.0kg

Internal Resistance (at 1KHz) Approx. 8mΩ

Maximum Discharge Current (5 secs) 540A

Charge Methods at 25°C

Standby Use Float Charging Voltage

13.5V to 13.8V Coefficient -3.0mV/°C/Cell

Maximum Charging Current

**Operating Temperature Range** 

Charge -15°C to 40°C -15°C to 50°C Discharae -15°C to 40°C Storage

Charge Retention (Shelf Life) at 20°C

1 month 92% 3 months 90% 6 months 80%

Case Material ABS UL94 HB

Termination F6 (M5 Bolt)

#### Description of Torque Value of Hardware for the Terminals

Recommended Torque Value M5: 5 N-m (51kgf-cm) M5: 5 N-m (61kgf-cm) Max. Allowable Torque Value

Design Life

Expected Trickle Design Life

Classified as a non-spillable battery.

- Approved for transportation by: • Air (IATA/ICAO provision A67)
- Road

Barcode

• Sea (per IMDG Special Provision 238)




6-9 years at 20°C


10.8A



## **DIMENSIONS**

## mm (inch)

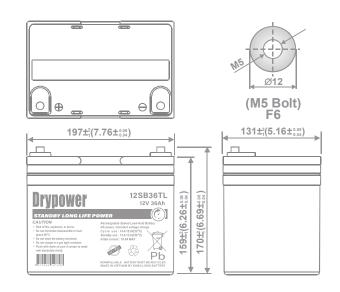


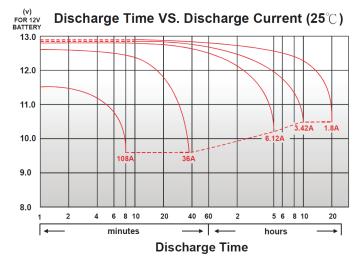





### **CHARACTERISTICS CHARTS**

Effect of Temperature on Capacity 25°C(77°F)

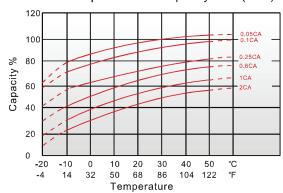



#### Trickle (or float) Service Life



#### **FEATURES & BENEFITS**

- Industry leading 99.99% pure lead content for superior service life and dependable performance.
- Long service life to reduce maintenance and logistical costs across telecom, utilities and off-grid applications.
- Minimises sulphation with a thicker plate design and higher percentage of tin content to maximise battery standby life.
- High rate discharge capable to ensure reliable performance.
- Maintenance free technology and non-spillable design.
- Manufactured by Kung Long Battery (KLB) at facilities in Taiwan and Vietnam. KLB is a leading manufacturer and complies with relevant international quality standards including ISO9001, CE ETL9000, UL1989, OHSAS18001 and ISO17025. KLB supports Green Sustainable supply chain practices.









Aug2020

Performance may vary depending on application. All specifications are correct at time of creation. All specifications and operation conditions contained in this datasheet are subject to change or improvement without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us.