

SLA
2V-40VDC
5A max.
50W

Turtle Charger (50W) - SLA

Pre-programmed Battery Charger for Sealed Lead Acid



DESCRIPTION

The TSB002-SLA series offer a wide range of single output DC chargers up to 50 Watts.

It is custom programmed by our engineers to fit specific design requirements for SEALED LEAD ACID (SLA).

Pre-programming includes functions setting, charging current and charging voltage, constant current, constant voltage, pre-conditioning, float charging, charge termination methods and setting. Input and output cabling and connector options for all international markets are available upon request.

Features:

- Choice of 50 different models.
- Wide input voltage range.
- Single voltage output up to 50W.
- Constant current limiting overload.
- Proven field reliability and performance.
- Status LED indicator.
- High operating temperature +71°C.

MOUNTING OPTIONS:

Modules available as options below:

PCB: PCB stand-alone charger.

ENCLOSURE: Housed enclosure for environmental protection.

GENERAL SPECIFICATIONS

Input Voltage	10-75VDC
Input Connector	2.1mm DC jack (enclosure)
Output Voltage	2V-40V for battery packs up to: – 20 cells in series (SLA)
Output Current	5A max.
Voltage Accuracy	<1%
Voltage Limit	2.25V ±1% p/cell
Current Accuracy	<5%
Tolerance on Timing	±5%
Temp. Accuracy	Internal: <1°C
	External: <1%, resolution 0.01°C
Dimensions	L112mm x W66mm x H40mm (enclosure)
Weight	140 grams (enclosure)


LED PATTERNS - ROUTINE

Traffic light (red-orange-green):	System reset. Occurs at power on and battery connection.
Slow orange blink:	System waiting. Battery disconnected.
Solid orange:	Constant current phase. (inc. pre-condition if programmed)
Orange with green blink:	Constant voltage phase
Solid green	Charge Complete. Float Charge continues (if programmed)

LED PATTERNS - EXCEPTIONS

Three red flashes:	Charge suspended. Battery volts too low.
Two red flashes:	Charge suspended. Battery volts too high.
Slow red blinking: (1 flash every 5 sec)	Charge suspended. Battery or PCB too hot (PCB self protected to 75°C)
Fast red blinking:	Thermistor Error. (Needs Power Reset)
Orange blinking: (1 flash every ½ sec)	Timeout. Time limit is customisable on request
Solid red:	Fault. (Needs Power Reset)

PCB

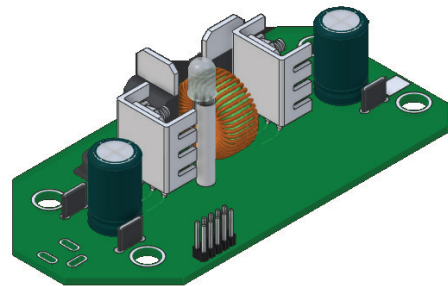


ENCLOSURE





PART NUMBER SELECTION KEY

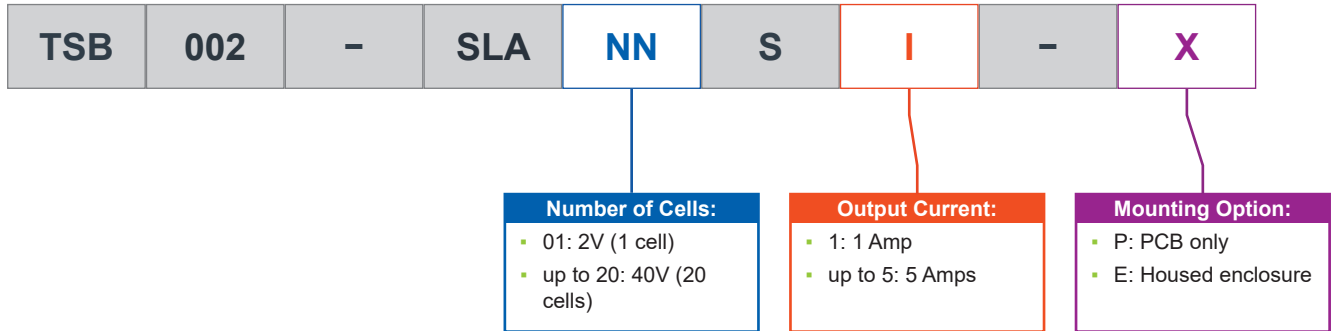

*Termination of choice available.

SELECTION TABLE

Part Number	Chemistry	Battery Pack Voltage	Input Voltage	Output Current	Mounting Option
TSB002-SLA01S5	Sealed Lead Acid	2VDC (1 cell)	10-75VDC	5A max.(11.25W)	<i>Select from options above</i>
TSB002-SLA01S4	Sealed Lead Acid	2VDC (1 cell)	10-75VDC	4A (9W)	
TSB002-SLA01S3	Sealed Lead Acid	2VDC (1 cell)	10-75VDC	3A (6.75W)	
TSB002-SLA01S2	Sealed Lead Acid	2VDC (1 cell)	10-75VDC	2A (4.5W)	
TSB002-SLA01S1	Sealed Lead Acid	2VDC (1 cell)	10-75VDC	1A (2.25W)	
TSB002-SLA02S5	Sealed Lead Acid	4VDC (2 cells)	10-75VDC	5A max.(22.5W)	
TSB002-SLA02S4	Sealed Lead Acid	4VDC (2 cells)	10-75VDC	4A (18W)	
TSB002-SLA02S3	Sealed Lead Acid	4VDC (2 cells)	10-75VDC	3A (13.5W)	
TSB002-SLA02S2	Sealed Lead Acid	4VDC (2 cells)	10-75VDC	2A (9W)	
TSB002-SLA02S1	Sealed Lead Acid	4VDC (2 cells)	10-75VDC	1A (4.5W)	
TSB002-SLA03S5	Sealed Lead Acid	6VDC (3 cells)	10-75VDC	5A max.(33.75W)	
TSB002-SLA03S4	Sealed Lead Acid	6VDC (3 cells)	10-75VDC	4A (27W)	
TSB002-SLA03S3	Sealed Lead Acid	6VDC (3 cells)	10-75VDC	3A (20.25W)	
TSB002-SLA03S2	Sealed Lead Acid	6VDC (3 cells)	10-75VDC	2A (13.5W)	
TSB002-SLA03S1	Sealed Lead Acid	6VDC (3 cells)	10-75VDC	1A (6.75W)	
TSB002-SLA04S5	Sealed Lead Acid	8VDC (4 cells)	10-75VDC	5A max.(45W)	
TSB002-SLA04S4	Sealed Lead Acid	8VDC (4 cells)	10-75VDC	4A (36W)	
TSB002-SLA04S3	Sealed Lead Acid	8VDC (4 cells)	10-75VDC	3A (27W)	
TSB002-SLA04S2	Sealed Lead Acid	8VDC (4 cells)	10-75VDC	2A (18W)	
TSB002-SLA04S1	Sealed Lead Acid	8VDC (4 cells)	10-75VDC	1A (9W)	
TSB002-SLA05S5	Sealed Lead Acid	10VDC (5 cells)	10-75VDC	4.44A (50W max.)	
TSB002-SLA05S4	Sealed Lead Acid	10VDC (5 cells)	10-75VDC	4A (45W)	
TSB002-SLA05S3	Sealed Lead Acid	10VDC (5 cells)	10-75VDC	3A (33.75W)	
TSB002-SLA05S2	Sealed Lead Acid	10VDC (5 cells)	10-75VDC	2A (22.5W)	
TSB002-SLA05S1	Sealed Lead Acid	10VDC (5 cells)	10-75VDC	1A (11.25W)	
TSB002-SLA06S4	Sealed Lead Acid	12VDC (6 cells)	10-75VDC	3.7A (50W max.)	
TSB002-SLA06S3	Sealed Lead Acid	12VDC (6 cells)	10-75VDC	3A (40.5W)	
TSB002-SLA06S2	Sealed Lead Acid	12VDC (6 cells)	10-75VDC	2A (27W)	
TSB002-SLA06S1	Sealed Lead Acid	12VDC (6 cells)	10-75VDC	1A (13.5W)	

All specifications are correct at time of creation. All specifications and operation conditions contained in this datasheet are subject to change or improvement without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us.



Part Number	Chemistry	Battery Pack Voltage	Input Voltage	Output Current	Mounting Option
TSB002-SLA07S4	Sealed Lead Acid	14VDC (7 cells)	10-75VDC	3.17A (50W max.)	<i>Select from options above</i>
TSB002-SLA07S3	Sealed Lead Acid	14VDC (7 cells)	10-75VDC	3A (47.25W)	
TSB002-SLA07S2	Sealed Lead Acid	14VDC (7 cells)	10-75VDC	2A (31.5W)	
TSB002-SLA07S1	Sealed Lead Acid	14VDC (7 cells)	10-75VDC	1A (15.75W)	
TSB002-SLA08S3	Sealed Lead Acid	16VDC (8 cells)	10-75VDC	2.78A (50W max.)	
TSB002-SLA08S2	Sealed Lead Acid	16VDC (8 cells)	10-75VDC	2A (36W)	
TSB002-SLA08S1	Sealed Lead Acid	16VDC (8 cells)	10-75VDC	1A (18W)	
TSB002-SLA09S3	Sealed Lead Acid	18VDC (9 cells)	10-75VDC	2.47A (50W max.)	
TSB002-SLA09S2	Sealed Lead Acid	18VDC (9 cells)	10-75VDC	2A (40.5W)	
TSB002-SLA09S1	Sealed Lead Acid	18VDC (9 cells)	10-75VDC	1A (20.25W)	
TSB002-SLA10S3	Sealed Lead Acid	20VDC (10 cells)	10-75VDC	2.22A (50W max.)	
TSB002-SLA10S2	Sealed Lead Acid	20VDC (10 cells)	10-75VDC	2A (45W)	
TSB002-SLA10S1	Sealed Lead Acid	20VDC (10 cells)	10-75VDC	1A (22.5W)	
TSB002-SLA11S3	Sealed Lead Acid	22VDC (11 cells)	10-75VDC	2.02A (50W max.)	
TSB002-SLA11S2	Sealed Lead Acid	22VDC (11 cells)	10-75VDC	2A (49.5W)	
TSB002-SLA11S1	Sealed Lead Acid	22VDC (11 cells)	10-75VDC	1A (24.75W)	
TSB002-SLA12S2	Sealed Lead Acid	24VDC (12 cells)	10-75VDC	1.85A (50W max.)	
TSB002-SLA12S1	Sealed Lead Acid	24VDC (12 cells)	10-75VDC	1A (27W)	
TSB002-SLA13S2	Sealed Lead Acid	26VDC (13 cells)	10-75VDC	1.71A (50W max.)	
TSB002-SLA13S1	Sealed Lead Acid	26VDC (13 cells)	10-75VDC	1A (29.25W)	
TSB002-SLA14S2	Sealed Lead Acid	28VDC (14 cells)	10-75VDC	1.59A (50W max.)	
TSB002-SLA14S1	Sealed Lead Acid	28VDC (14 cells)	10-75VDC	1A (31.5W)	
TSB002-SLA15S2	Sealed Lead Acid	30VDC (15 cells)	10-75VDC	1.48A (50W max.)	
TSB002-SLA15S1	Sealed Lead Acid	30VDC (15 cells)	10-75VDC	1A (33.75W)	
TSB002-SLA16S2	Sealed Lead Acid	32VDC (16 cells)	10-75VDC	1.39A (50W max.)	
TSB002-SLA16S1	Sealed Lead Acid	32VDC (16 cells)	10-75VDC	1A (36W)	
TSB002-SLA17S2	Sealed Lead Acid	34VDC (17 cells)	10-75VDC	1.31A (50W max.)	
TSB002-SLA17S1	Sealed Lead Acid	34VDC (17 cells)	10-75VDC	1A (38.25W)	
TSB002-SLA18S2	Sealed Lead Acid	36VDC (18 cells)	10-75VDC	1.23A (50W max.)	
TSB002-SLA18S1	Sealed Lead Acid	36VDC (18 cells)	10-75VDC	1A (40.5W)	
TSB002-SLA19S2	Sealed Lead Acid	38VDC (19 cells)	10-75VDC	1.17A (50W max.)	
TSB002-SLA19S1	Sealed Lead Acid	38VDC (19 cells)	10-75VDC	1A (42.75W)	
TSB002-SLA20S2	Sealed Lead Acid	40VDC (20 cells)	10-75VDC	1.11A (50W max.)	
TSB002-SLA20S1	Sealed Lead Acid	40VDC (20 cells)	10-75VDC	1A (45W)	




*****IMPORTANT:** The Part Number must have the mounting option code (-P, or -E) your project requires.

All specifications are correct at time of creation. All specifications and operation conditions contained in this datasheet are subject to change or improvement without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us.





TECHNICAL DIAGRAMS (2D)

ENCLOSURE

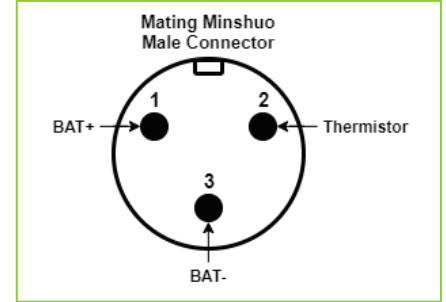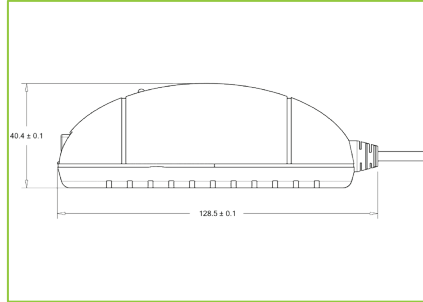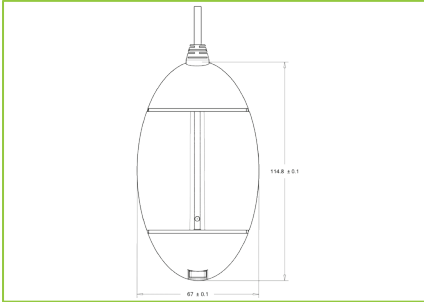

PCB

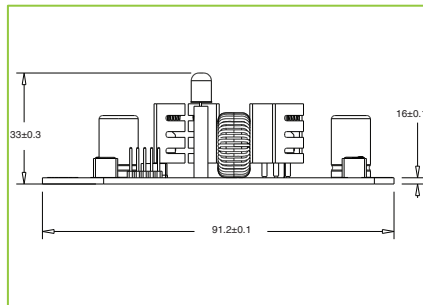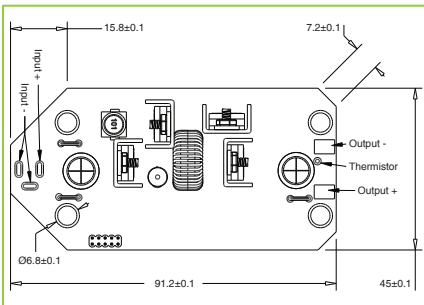

All dimensions in millimeters (mm).

All specifications are correct at time of creation. All specifications and operation conditions contained in this datasheet are subject to change or improvement without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us.