

浙江兴海能源科技有限公司
Zhejiang Xinghai Energy Technology Co. Ltd

连接片和塑料支架规格书
Specification for connectors and plastic holder

地址：浙江省长兴县经济开发区太湖大道

Address: Taihu load, Economic Development Zone, Changxing County, Zhejiang
Province, China

38#和 40#电芯配备了相应规格的连接片和支架。


The 38# and 40# cell are equipped with connectors and holder

1、连接片 connector

连接片分为两孔和四孔两种规格, 分别有镀镍铜片和镀镍钢片两种材质。

The connector is divided into two-hole and four-hole specifications, nickel-plated copper connector and nickel-plated steel connector.

1.1 两孔连接片 2-hole connector

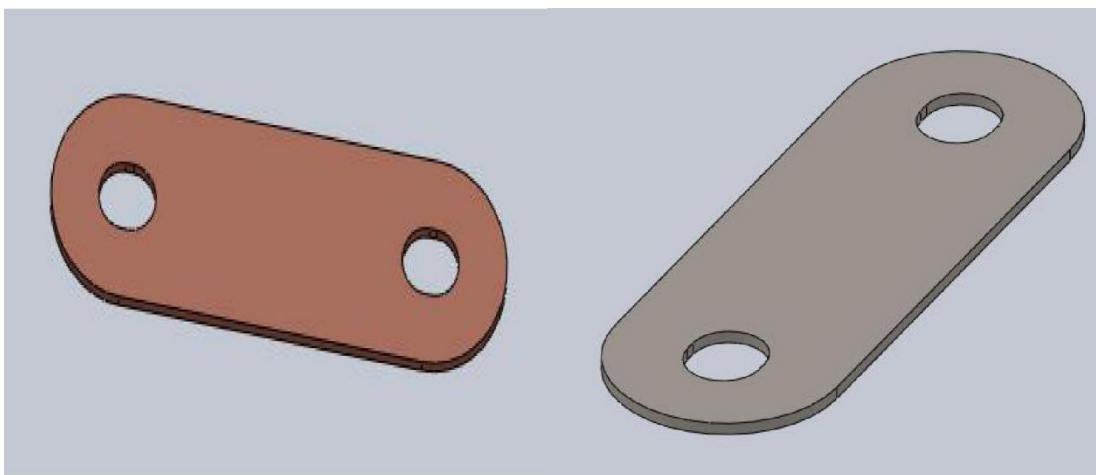

名称: 38#两孔连接片

Name: 38#2-hole connector

材料: 镀镍铜片

Material: Nickel plated copper connector

尺寸dimension: 60*20*1.0mm


名称: 38#两孔连接片

Name: 38#2-hole connector

材料: 镀镍钢片

Material: Nickel plated steel connector

尺寸dimension: 60*20*1.0mm

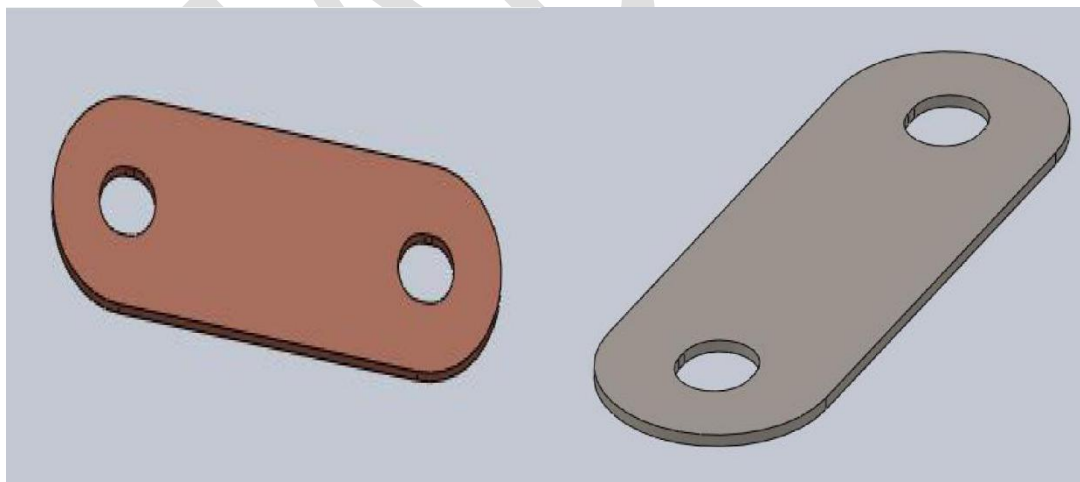

名称: 40#两孔连接片

Name: 40#2-hole connector

材料: 镀镍铜片

Material: Nickel plated copper connector

尺寸dimension: 58*18*1.2mm

名称: 40#两孔连接片


Name: 40#2-hole connector

材料: 镀镍钢片

Material: Nickel plated steel connector

尺寸dimension: 58*18*1.2mm


1.2 四孔连接片

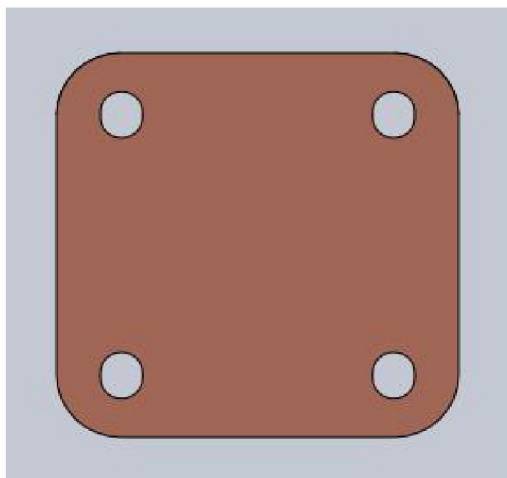

名称: 38#四孔连接片

材料: 镀镍铜片


尺寸: 60*60*0.6mm

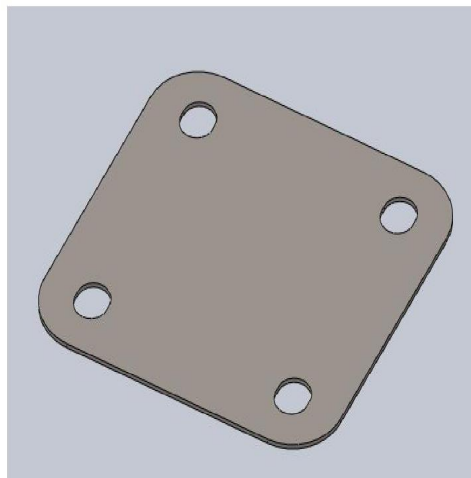

名称: 38#四孔连接片

材料: 镀镍钢片


尺寸: 60*60*0.6mm

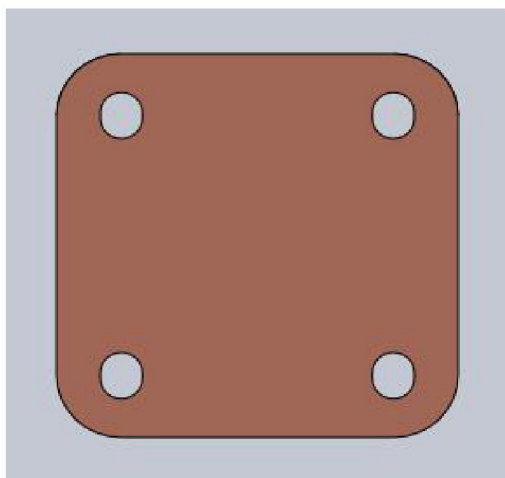

名称: 40#四孔连接片

材料: 镀镍铜片

尺寸: 62*62*0.6mm

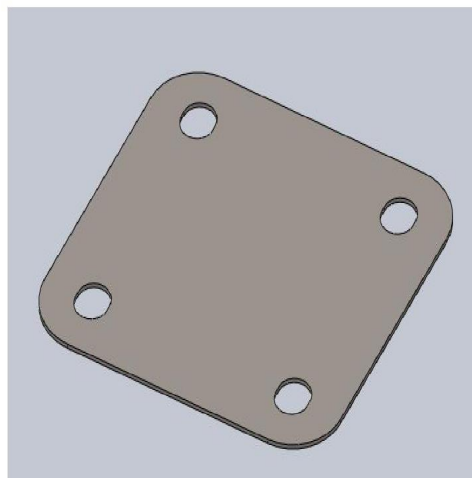

名称: 40#四孔连接片


材料: 镀镍钢片

尺寸: 62*62*0.6mm

2、塑料支架 Plastic holder

支架采用阻燃 ABS 材料制作而成, 具有 38#和 40#两种规格。

Holder adopt to flame retardant ABS material, specifications of 38# and 40# holder as follows:

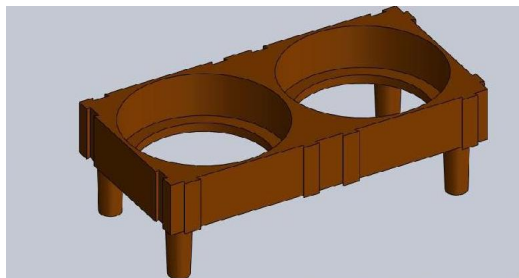


名称: 38#两孔支架

Name: 38# 2-hole holder

材料Material: ABS

尺寸Dimension: 81*41*17mm

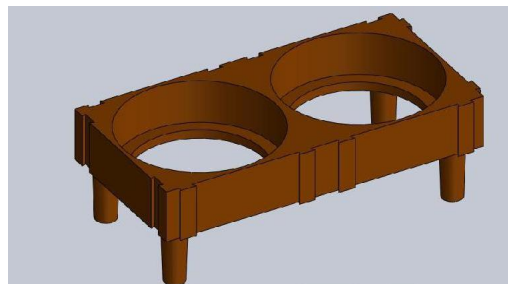

名称: 40#两孔支架

Name: 40# 2-hole holder

材料Material: ABS

尺寸Dimension: 85*43*22mm