


12V Series All Purpose Lithium Ion Batteries



The Pylontech 12V Series are developed all-purpose lithium ion battery modules. With the cutting edge LFP (Lithium iron Phosphate) cell, embedded BMS (Battery Management System) and mechanical design, Pylontech RT12V Series product provides inherent safety, extreme high reliability and zero maintenance. Comparing to the same capacity lead-acid based batteries, it has more than twice of the usable capacity, more than 3 times of the life cycle, but only about 40% of the weight. It is a perfect replacement to the lead acid based batteries in the applications such as marine, RV, golf carts and solar storage. RT12V Series product will bring you the perfect experience in different applications.



Intelligent Battery Management System

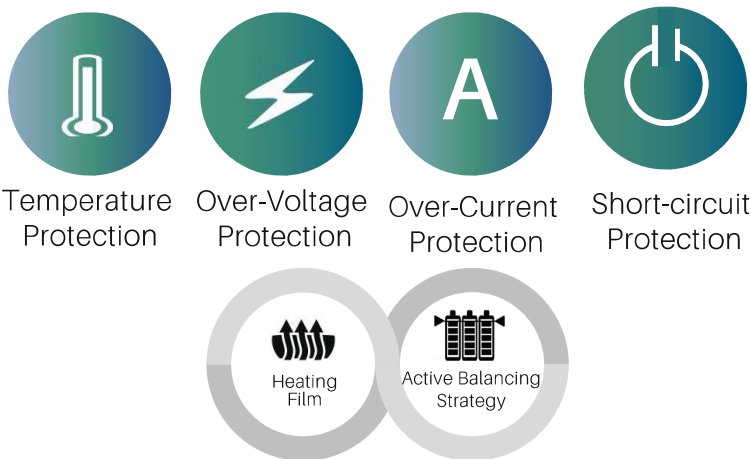

RT12100G31 provides 60% more usable power than its equivalent lead acid cousin and being nearly 60% lighter and 50% smaller makes for a superior alternative.



KEY FEATURES

Auto-Balance

Connects multiple batteries in parallel safely without internal state non-uniformity issues.

Ultra-Safety

The battery management system (BMS) provides comprehensive protection to the battery and manages the charging/discharging process wisely.

Uncompromised Quality

State-of-the-art battery cells ensure a lifespan of more than 6000 cycles, 100A continuous discharge current, and a wide range of operation temperature.

Communication

CAN, RS485, BlueTooth, Dry Contact enable data transmission to meet the needs of different usage scenarios..

Continually Value for Better life with the Smart Power.

12 Volt Lithium-Iron-Phosphate Batteries Smart With Bluetooth



PYLONTECH

TECHNICAL SPECIFICATIONS

Modele	RT12100G31
Electrical	
Nominal Voltage(V)	12.8
Nominal Capacity(Ah)	100
Working Voltage Range(VDC)	10.8~14.4
Internal Resistance(m Ω)	<20
Charge Voltage(VDC)	14V-14.4
Nominal Operation Current(A)	20
Max. continuous operation current(A)	100
Peak Current(A)	200A@30sec
Serial Connection	Up to 4 in series (4S4P Max.)
Parallel Connection	Up to 16 in Parallel (1S16P, 2S8P, 4S4P Max.)
Structure	
Dimension (mm)	325*173.5*226
Weight(Kg)	13kg \pm 0.2
IP rating	IP67
Power Terminal	M8 bolt
Working Environment	
Charge working temperature (°C)	0 ~ 60
Discharge working temperature (°C)	-20 ~ 60
Working temperature (°C)	-40 ~ 60*
Altitude (M)	<4,000
Humidity(RH)	5~95% (w/o condensing)
Communication	
RS485	115200bps
CAN	500Kbps
Bluetooth	BLE5.0
Dry contactor	2 <input/> s & 2 <input/> s
Certification	
SAE J930, SAE J1455, UL 1973, IEC62619,FCC,CE, Bluetooth SIG, UN38.3	

*During -40 °C ~ -20°C , only heater will be enabled for heating up the module, battery cannot charge/discharge during such period.

