



Desay Lithium

Cell Type FR10445/FR03/AAA Specification

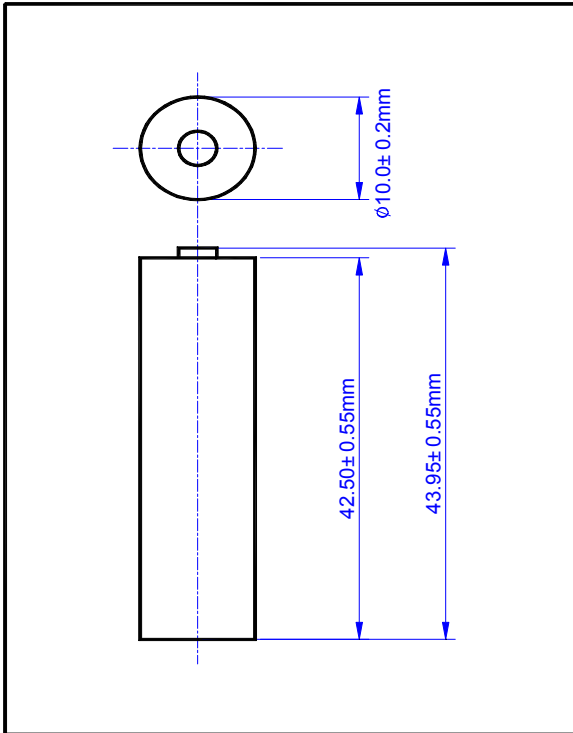


| | | |
|--------------------------------------|----------|-----------|
| Nominal Voltage | | 1.5V |
| Dimensions (Max.) | Diameter | 10.5mm |
| | Height | 44.5mm |
| Ref.Weight | | 7.3g |
| Nominal Capacity(Ave.) | | 1000mAh |
| Continuous Standard Load | | 600mA |
| Cut off Voltage | | 0.8V |
| Reference Capacity | | 1150mAh |
| Reference Continuous Load | | 100mA |
| Reference Cut off Voltage | | 1.0V |
| Maximum Continuous Discharge Current | | 1500mA |
| Maximum Pulse Discharge Current | | 2000mA |
| Operating Temperature | | -40~60° C |


Discharge Characteristics

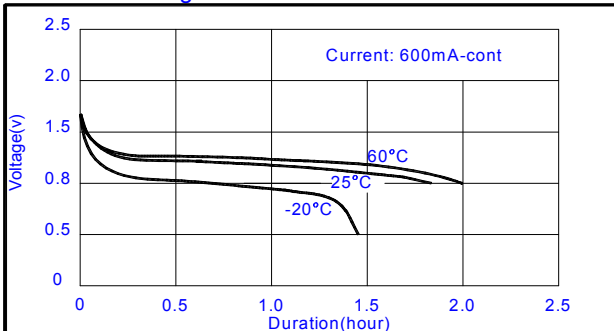


Discharge Characteristics

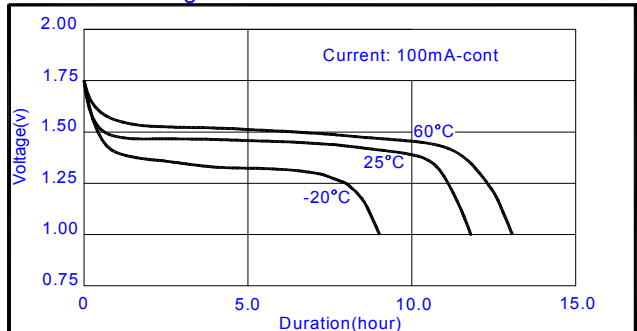

Pulse Discharge Characteristics

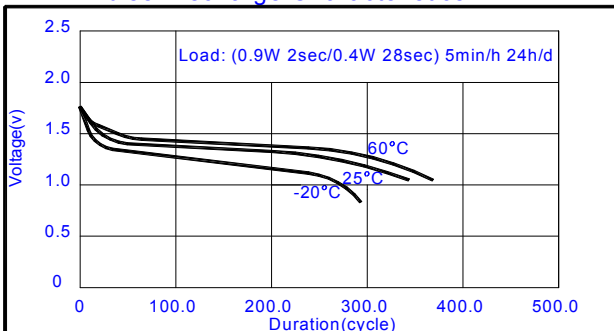

Discharge Characteristics

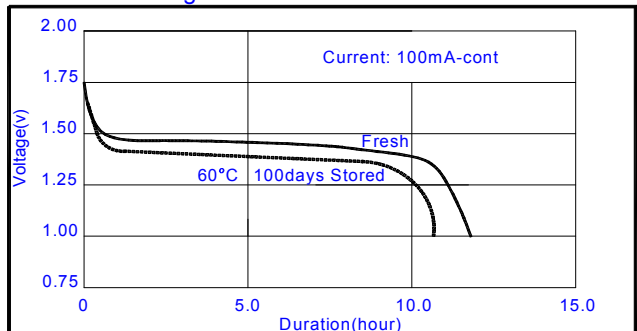

WARNING:

- KEEP AWAY FROM SMALL CHILDREN. IF SWALLOWED, PROMPTLY SEE DOCTOR.
- FIRE, EXPLOSION, BURN HAZARD. DO NOT OPEN BATTERY, DISPOSE OF IN FIRE, HEAT ABOVE 100°C (212°F), EXPOSE CONTENTS TO WATER, RECHARGE, PUT IN BACKWARDS, MIX WITH USED OR OTHER BATTERY TYPES - MAY EXPLODE OR LEAK AND CAUSE PERSONAL INJURY.

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice.