


## SPECIFICATIONS:




(top view) (bottom view)

## Industry Standard Dimensions

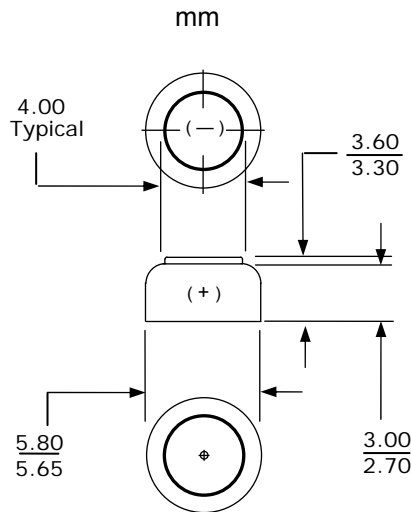


## Discharge Charts of IEC 60086-2:2015 Standards

Hearing aid standard

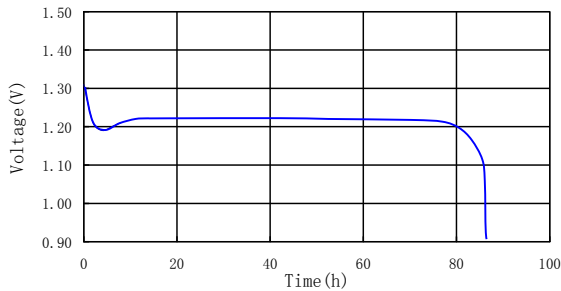


Hearing aid high drain

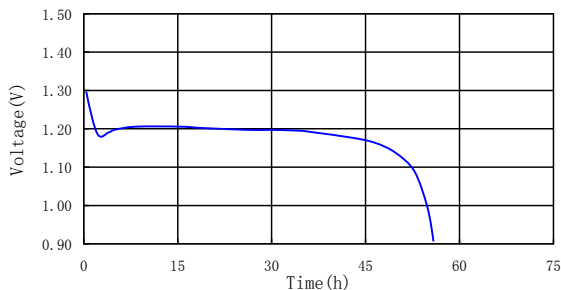

<b>Chemical System:</b>	Zinc Air (Zn/O <sub>2</sub> )
<b>Identification:</b>	IEC-PR70
<b>Tab Color:</b>	Yellow
<b>Build Standard:</b>	IEC 60086-1:2015 IEC 60086-2:2015
<b>Nominal Voltage:</b>	1.45 Volts
<b>Capacity:</b>	At 20±2 °C 55 ± 10%RH
<b>hearing aid standard</b>	86 h (86 mAh) (Rated at 1 mA continuous & 5 mA / 100 ms Pulses to 1.05 volts)
<b>hearing aid high drain</b>	52 h (78 mAh) (Rated at 1.5 mA continuous & 5 mA / 100 ms Pulses to 1.1 volts)
<b>Capacity Retention:</b>	> 85%(after 3 years)
<b>Available Current:</b>	4 mA(at 1.1 volts)
<b>Tab Sealing Arrangements:</b>	On Cathode Can. See picture above.
<b>Shelf Life:</b>	3 years
<b>Operation Temp:</b>	0°C to 50°C
<b>Typical Weight:</b>	0.29 grams (0.01 oz.)
<b>Typical Volume:</b>	0.08 cubic centimeters (0.005 cubic inch)
<b>Impedance:</b>	≤ 8 ohms (at AC 1000Hz)

## Construction

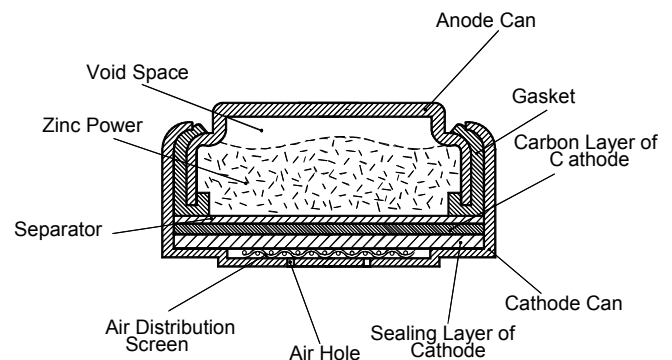

## ZeniPower Battery Co., Ltd.

7B, No. 130, Xinghua Road, Xiangzhou, Zhuhai, GD 519002, China

E-mail: [info@zenipower.com](mailto:info@zenipower.com)

Home Page: [www.zenipower.com](http://www.zenipower.com)

Tel: +86-756-252 6620 Fax: +86-756-252 6630

This data sheet is subject to change without prior notice. Contact us for the latest information. Contents here do not constitute a warranty.