

TENTATIVE

**LITHIUM ION BATTERY
SPECIFICATION**

BATTERY CLASSIFICATION LITHIUM ION BATTERY (POUCH TYPE)

PRODUCT CODE (T.B.D.)

CLIENT

【 The client's agreement 】

Signature: _____

Name in block letters: _____

Date: _____

*If there is no reply within 30 days after the delivery, this document shall be presumed valid.

**Portable Rechargeable Battery Business Division,
SANYO Electric Co.,Ltd.
Automotive & Industrial Systems Company
of Panasonic Group**

Technical Service Group No.3
MC Business Development Team

Dft.	<i>N. Ito</i>
Chk.	<i>J. Hamada</i>
Chk.	<i>A. Sawada</i>
App.	<i>K. Kobayashi</i>

Contents

	Page
1. Publication Record	1
2. Safety Instructions	2
3. Extent of the Application	6
4. Battery Classification, Product Code and Model Name	6
5. Nominal Specifications	6
6. Electrical Characteristics	7
7. Design and Dimensions	10
8. Appearance	10
9. Shipping Charge	10
10. Precautions on Designing of Tablet, the Charger and the Battery Pack	11
11. Storing Conditions	13
12. Handling Precautions for Lithium Ion Cells	13
13. Warranty Exemptions	14
14. Other Remarks	14
15. Standard Charging Method	14
16. Battery Warranty Period	15
17. Battery Safety Requirements	15
18. Precautions for Lithium Pouch Type Cells	15
19. Document Terms (Only Tentative Specification)	15

Title	Specifications of Lithium Ion battery (Pouch Type)	page	1/15
-------	--	------	------

1. Publication Record

No.	Date	Class	Items		
(0)	17/Oct./2013	—	Issue(Tentative)	Dft.	Ijitsu <i>N. Ijitsu</i>
				Chk.	Hamada <i>S. Hamada</i>
				Chk.	Sawada <i>A. Sawada</i>
				App.	Nakanishi <i>K. Nakanishi</i>
				Dft.	
				Chk.	
				Chk.	
				App.	
				Dft.	
				Chk.	
				Chk.	
				App.	
				Dft.	
				Chk.	
				Chk.	
				App.	

*Key to Class abbreviations : A for Added, D for Deleted, R for Revised

File No.	UPF3259132-001	Portable Rechargeable Battery Business Division, SANYO Electric Co., Ltd.
----------	----------------	--

Title	Specifications of Lithium Ion battery (Pouch Type)	page	2/15
-------	--	------	------

2. Safety Instructions

Prohibited Actions

The cell contains flammable objects such as organic solvents. If the battery is mishandled, it may cause fire, smoke or an explosion and the battery's functionality will be seriously damaged. Please read and check the following prohibited actions. Also, please equip a protection in the application so the application troubles don't affect the battery. Additionally, SANYO highly recommends embedding these instructions into the owner's manual.

! D a n g e r

- Immersion

"Do not immerse the battery with liquid such as water, sea water or soda."

The battery or the battery pack (including protection circuit) may catch on fire, smoke, explode, or cause heat generation by unexpected electrical load.

- High Temperature

"Do not use or place the battery near fire, a heater or a high temperatures (more than 80°C)."

The battery's polyolefin separator may get damaged from the heat and could cause an internal short circuit. This may cause the battery to catch on fire, smoke, explode, or cause heat generation.

- Charger and Charge Condition

"Do not use unauthorized chargers."

If the battery is charged under unacceptable conditions (For example: usage in restricted temperature ranges, over voltage, or over current with unauthorized chargers) the battery may catch on fire, smoke, explode, or cause heat generation.

- Reverse Polarity

"Do not force a reverse-charge or a reverse-connection."

The battery has correct polarity. If the battery doesn't fit, please check the battery's orientation and do not force into the battery mount. If the battery is forced to set with a different polarity, the battery may catch on fire, smoke, explode, or cause heat generation.

- Direct Connection

"Do not connect the battery with AC plug (outlet) or car plugs."

The battery requires a specific charger. If the battery connects with the outlet directly, the battery may catch on fire, smoke, explode, or cause heat generation.

File No	UPF3259132-001	Portable Rechargeable Battery Business Division, SANYO Electric Co., Ltd.
---------	----------------	--

Title	Specifications of Lithium Ion battery (Pouch Type)		page	3/15
<ul style="list-style-type: none"> ● Inappropriate Use with Other Equipment <i>"Do not adapt the battery to unspecified applications. "</i> If the battery is used for unspecified applications or systems, the battery may get damaged or catch on fire, smoke, explode, or cause heat generation. ● Incineration and Heat <i>"Please keep the battery away from heat and fire"</i> The battery materials will get damaged and may catch on fire, smoke, explode, or cause heat generation. ● Short-Circuit <i>"Do not make a short-circuit. "</i> Do not connect the + and - terminals with conductive material. Do not carry or store the battery with metal objects (such as wire, necklace or hairpins). If the battery is in a short-circuit, excessive large current will flow and may catch on fire, smoke, explode, or cause heat generation. ● Impact <i>" Avoid unnecessary impact to the battery"</i> Unnecessary impact may cause the battery to leak, heat generation, smoke, fire or explode. Also, the protection circuit may break and that will lose the function of the battery's protection system. ● Penetration <i>" Do not penetrate with a nail or strike with a hammer"</i> The battery cell may get destroyed or damaged. And the battery's protection circuit may get damaged and cause an internal short-circuit. Additionally, the battery may catch on fire, smoke, explode, or cause heat generation. ● Soldering <i>"Do not directly solder the battery"</i> The insulator could melt or the gas release vent might get damaged from the heat. Additionally, the battery may catch on fire, smoke, explode, or cause heat generation. ● Disassemble and Reconstruction <i>"Do not disassemble the battery"</i> If the protection circuit gets damaged, the battery will not be protected. Then, the battery may catch on fire, smoke, explode, or cause heat generation. ● Charge near High Temperatures <i>"Do not charge the battery near high temperatures"</i> If the battery is charged near high temperatures, the battery may not be able to charge due to the activation of the protection circuit. In these conditions, the protection circuit may break and the battery may catch on fire, smoke, explode, or cause heat generation. 				
File No	UPF3259132-001	Portable Rechargeable Battery Business Division, SANYO Electric Co., Ltd.		

Title	Specifications of Lithium Ion battery (Pouch Type)	page	4/15
-------	--	------	------

! W a r n i n g

- Ingestion

"Keep away from infants"

The battery should be kept away from infants. In case of swallowing the battery, see a doctor immediately.

- Storing

"Do not put the battery in the microwave or other cooking appliances"

The battery may on fire, smoke, explode, or cause heat generation due to heat or the electrical impact from the microwave.

- Mixed Use

"Do not mix the battery with other batteries."

The battery should not be used with other batteries with different capacity, chemistry or manufacturer. Do not connect with other batteries or mix with other batteries. The battery may catch on fire, smoke, explode, or cause heat generation.

- Rust, Changing Color and Deformities

"Do not use abnormal batteries."

Please stop using the battery if there are noticeable abnormalities such as abnormal smell, heat, deformities, or discoloration. The battery may have a defect and may catch fire, smoke, heat generation or explode if used continuously.

- Charging Time

" Stop charging if the charging process cannot be finished."

If the battery can not finish the charging process within the specified time, please stop the charging process. The battery may catch on fire, smoke, explode, or cause heat generation.

- Leakage①

"Do not use a leaking battery near flames"

If the battery or liquid leaking from the battery has a pungent odor, the battery should keep away from flames. The battery may ignite and explode.

- Leakage②

"Do not touch a leaking battery"

If the liquid leaking from the battery gets into eyes, it will cause significant damage. If the leaking liquid gets into your eyes, please flush eyes immediately with pure water. Please consult a physician immediately. If the liquid remains in the eyes it will cause significant damage.

- Transport

" Pack the battery tightly during transport"

To prevent short-circuit or damages, please tightly pack the battery into a case or a carton box.

File No	UPF3259132-001	Portable Rechargeable Battery Business Division, SANYO Electric Co., Ltd.
---------	----------------	--

Title	Specifications of Lithium Ion battery (Pouch Type)	page	5/15
-------	--	------	------

! C a u t i o n

- **Use under Direct Sunlight**

Do not use or leave the battery in excessive heat such as in a car in direct sunlight.

The battery may catch on fire, smoke, explode, or cause heat generation. Also, it might cause a deterioration of battery's characteristics and battery life.

- **Static Electricity**

The battery pack has a protection circuit. Do not use the battery where it generates static electricity (more than 100V) that might damage the protection circuit. If the protection circuit is broken, the battery may catch on fire, smoke, explode, or cause heat generation.

- **Charging Temperature Range**

Charging temperature range is regulated between 0°C and 45°C. Do not charge the battery out of the specified temperature range. Otherwise, it may cause heat generation, leakage or a serious damage. Also, it might cause deterioration of the battery's characteristics and battery life.

- **Manual**

Please read the manual before usage. Please save the manual for future reference.

- **Charging Method**

Please read the charger's manual for the charging method.

- **First Time Use**

Please contact the supplier If the battery has unusual odor, heat generation or rusts during the first usage.

- **Use by Children**

Parents must explain how to use the system and the battery. Please check back periodically to ensure children are using the system and the battery correctly.

- **Inflammable Materials**

Please keep away from flammable materials during the charge and the discharge. It may catch on fire, smoke, explode, or cause heat generation.

- **Leakage**

If electrolyte leak from the battery and adhere to the skin or clothes, immediately flush it with water. Otherwise, it may cause skin irritation.

- **Insulation**

If lead wires or metal objects come out from the battery, please seal and insulate them completely. Otherwise, the battery may cause a short circuit and catch on fire, smoke, explode, or cause heat generation.

- **Recycle**

Please recycle the battery according to local rules or regulations after use.

File No	UPF3259132-001	Portable Rechargeable Battery Business Division, SANYO Electric Co., Ltd.
---------	----------------	--

Title	Specifications of Lithium Ion battery (Pouch Type)	page	6/15
-------	--	------	------

3. Extent of the Application

4. Battery Classification, Product Code and Model Name

4.1	Battery Classification	Lithium Ion Battery (Pouch Type)
4.2	Battery Type	UPF3259132TA
4.3	Product Code	(T.B.D.)
4.4	Model Name	UPF3259132T-H001A

5. Nominal Specifications

Item	Specification	Remark		
5.1	Nominal Capacity	Min.3350 mAh	0.2C discharge	
5.2	Nominal Voltage	3.8 V		
5.3	End Voltage	3.00 V		
5.4	Charging Current (Max.)	1.0C(=3.35) A	0 ~ +60°C	
5.5	Charging Voltage	4.35±1%V	0 ~ +50°C max. ^(*1)	
		4.10±1%V	+50 ~ +60°C ^(*2)	
5.6	Charging Time (Std.)	3 hours	0 ~ +60°C	
5.7	Discharging Current (Max.)	6.70 A	-20 ~ +60°C ^(*3)	
5.8	Internal Resistance	less than 30 mΩ	AC Impedance 1kHz	
5.9	Weight	Less than 52 g		
5.10	Storing Conditions	less than 1 month	-20 ~ +60°C,@RH 90%(max.)	Percentage of recoverable capacity 80% ^(*4)
		less than 3 months	-20 ~ +40°C,@RH 90%(max.)	
		less than 1 year	-20 ~ +20°C,@RH 90%(max.)	

^(*1) Basically this temperature is 45°C, but 50°C max. is allowable as long as thermistor sensing tolerance is taken into consideration.

^(*2) Re-charging condition is recommended that cell voltage goes down 3.80V or less.

^(*3) There is almost no capacity even if the capacity measured by 2CA discharge at -20~0°C.

^(*4) Percentage of recoverable capacity

= (discharging time after storage/Initial discharging time)×100

Discharging time is measured by the discharge at 0.2CA to 3.00V end voltage after fully charged according to specification at approximately 25°C.

File No	UPF3259132-001	Portable Rechargeable Battery Business Division, SANYO Electric Co., Ltd.
---------	----------------	--

Title	Specifications of Lithium Ion battery (Pouch Type)		page	7/15
6. Electrical Characteristics				
Items	Conditions		Criteria	
6.1 Full Charge	The battery is charged with 1.0C(=3.35)A constant current until the voltage reaches 4.35V. Then, the current is reduced in order to keep the constant voltage of 4.35V. The total charging time is 3.0 hours at 25 °C.			
6.2 Capacity	<p>① Within 1 hour, after fully charged at 25°C, the battery is discharged with 0.2C(=0.67)A continuously until 3.00V of end voltage at 25°C.</p> <p>② Within 1 hour, after fully charged at 25°C, the battery is discharged with 0.5C(=1.675)A continuously until 3.00V of end voltage at 25°C.</p> <p>③ Within 1 hour, after fully charged at 25°C, the battery is discharged with 1.0C(=3.35)A continuously until 3.00V of end voltage at 25°C.</p>		<p>More than 300 min.</p> <p>More than 117 min.</p> <p>More than 54 min.</p>	
6.3 Cycle Life	<p>Each cycle is an interval between the charge current 1.0C(=3.35)A with 1/50CA cut-off and the discharge current 1C(=3.35)A with 3.00V cut-off at 25°C. Capacity is measured at 100th cycle, 300th cycle and 500th cycle by the method defined as below.</p> <p>Capacity measurement condition Charge:CC-CV: 1.0CA-4.35V (3 hours cut) at 25°C Discharge:CC: 0.2CA- 3.00V cut at 25°C</p>		<p>100cyc. Capacity ≥ 95% of the minimum capacity</p> <p>300cyc. Capacity ≥90% of the minimum capacity</p> <p>500cyc. Capacity ≥80% of the minimum capacity</p>	
6.4 Temperature Characteristics	<p>① Within 1 hour, after fully charged at 25°C, the battery is stored at 0 °C for 3 hours. After that, the discharge time is measured Item 6.2.③ at 0 °C.</p> <p>② Within 1 hour, after fully charged at 25°C, the battery is stored at 60 °C for 3 hours. After that, the discharge time is measured Item 6.2.③ at 60 °C.</p>		<p>More than 25 min.</p> <p>More than 50 min.</p>	
File No	UPF3259132-001	Portable Rechargeable Battery Business Division, SANYO Electric Co., Ltd.		

Title	Specifications of Lithium Ion battery (Pouch Type)	page	8/15
6.5 Storage at Fully Charged State	<p>①After fully charged at 25°C, the battery is stored for 10 days at 60 °C. After the storage, the battery is set in 25°C for 3 hours. Then, the discharge time is measured Item 6.2.③.</p> <p>Then, the same battery is fully charged again and checked the second discharge time by the Item 6.2.③ at 25 °C.</p> <p>②After fully charged at 25°C, the battery is stored for 20 days at 60 °C. After the storage, the battery is set in 25°C for 3 hours. Then, the discharge time is measured Item 6.2.③.</p> <p>Then, the same battery is fully charged again and checked the second discharge time by the Item 6.2.③ at 25 °C.</p>	More than 25 min.	
6.6 Storage at Full Discharged State	<p>After fully charged at 25°C, the battery is discharged by the Item 6.2.③. Then, the battery is stored for 20 days at 60 °C. After the storage, the battery is set in 25°C for 3 hours. Then, the discharge time is measured by Item 6.2.③ at 25°C.</p>	More than 35 min.	
		More than 20 min.	
		More than 30 min.	
		More than 45 min.	
File No	UPF3259132-001	Portable Rechargeable Battery Business Division, SANYO Electric Co., Ltd.	

Title	Specifications of Lithium Ion battery (Pouch Type)	page	9/15
6.7 Cell thicknes			
<p>STANDARD TEST CONDITIONS:</p> <p>The testes shall be implemented with new batteries that were delivered within the last 7 days.</p> <p>The tests shall be performed at 25 ± 2 °C (The standard temperature of second grade is specified by <i>JIS Z 8703</i> (Standard Test Conditions)), 65 ± 20 % (The standard humidity of twentieth grade is specified by <i>JIS Z 8703</i> (Standard Test Conditions)). The grade of voltmeter and ammeter in the tests shall be higher than Class 0.5 which is specified by <i>JIS C 1102</i> (Electric Indicator).</p>			
File No	UPF3259132-001	Portable Rechargeable Battery Business Division, SANYO Electric Co., Ltd.	

Title	Specifications of Lithium Ion battery (Pouch Type)	page	10/15
-------	--	------	-------

7. Design and Dimensions

The battery design is shown in the following documents or drawings.
(Drawing No. UPF3259132T-H001A01)

8. Appearance

The battery should not have the following appearance issues at delivery:

- Scratch
- Rust
- Discoloration
- Dirt
- Deformation
- Leakage

The battery should be in good condition.

9. Shipping Charge

File No	UPF3259132-001	Portable Rechargeable Battery Business Division, SANYO Electric Co., Ltd.
---------	----------------	--

Title	Specifications of Lithium Ion battery (Pouch Type)	page	11/15
<p>10. Precautions for Designing of Tablets, the Chargers and the Battery Packs</p> <p>10-1. Precautions for Designing of Tablet and the Charger.</p> <p>(1) Charge</p> <ul style="list-style-type: none"> · The battery is charged by a method of constant current-constant voltage. · Regarding UPF3259132T-H001A, the charging current should not exceed 0.63A /cell. · The charging voltage should not exceed 4.35V/cell. The charging voltage is required to be set to less than 4.38V/cell with considering the accuracy of charger. Even if the charger is failed, the total safety shall be secured. · The charger shall be equipped with a pre-charge system. If battery voltage goes down to less than 3.0V/cell, the battery should be charged by pre-charge current of maximum 0.10A. Once, the battery reached more than 3.0V/cell by the pre-charging, the charger can resume the standard charging method. However, if the battery voltage never recovers more than 3.0V/cell, the charger must be stopped and turned off. · The charger shall be equipped a full charge detection. The charger shall detect the full-charged state by a timer, current detection or open circuit voltage detection. When the charger detects the full-charge, the charger shall stop charging. Do not apply the continuous charging (trickle charging) method. · The charging temperature range should be set between 0°C to +60°C. <p>(2) Discharge</p> <ul style="list-style-type: none"> · The discharge current should not exceed 6.70A/cell. · The discharge temperature should be between -20°C to +60 °C. · The discharge end voltage should be more than 3.00V/cell. <p>(3) Over discharge</p> <ul style="list-style-type: none"> · Do not discharge the battery less than 2.0V/cell. <p>(4) Design of Tablets and chargers.</p> <ul style="list-style-type: none"> · The cells should be kept away from heat generating electronic parts in order to avoid deterioration of battery performance. <p>10-2. Precautions for Battery Pack Design.</p> <p>(1) Shape, mechanism and material of battery packs</p> <ul style="list-style-type: none"> · The battery pack should be designed so it does not connect with to unauthorized chargers. · The battery pack should be designed so it cannot connect with unauthorized equipment and/or devices. · The terminal shape should be designed to avoid short circuit issues. In addition, the battery pack should be equipped with an over current protection function in order to prevent from external short circuit issues. · The terminal shape and structure should be designed so it does not connect in backwards. · The battery pack should be designed to prevent static electricity, electrolyte or water ingress issues. 			
File No	UPF3259132-001	Portable Rechargeable Battery Business Division, SANYO Electric Co., Ltd.	

Title	Specifications of Lithium Ion battery (Pouch Type)	page	12/15
<ul style="list-style-type: none"> · The battery pack should be designed so the protection circuit functions can be inspected during the assembly process. · The battery pack should be designed so electrolyte cannot reach to the protection circuit board even if electrolyte leak out of the cells. · The battery pack should be designed so the laminate is not easily connected with the conductive components. · Do not solder directly onto tabs to avoid melting of the laminate and/or the sealing from melting. · The cells should be fixed by a tape or a glue in the case. If the battery pack is dropped, the cells should be protected against dents, deformations and other mechanical stresses. · Plastic cases should be closed with glue. If an ultra sonic welding method is applied to the case sealing, SANYO will not take any responsibilities for any defects. · The pack shall be designed so end users cannot remove or disassemble the cells. · Protection devices (For example: PTC or a thermal fuse) shall be equipped on every cell in the appropriate area of the cell where temperature can be detected accurately. A wrong setting will result in defects and issues. <p>(2) Protection circuit</p> <p>The following protection circuit should be equipped in the battery pack:</p> <ul style="list-style-type: none"> · Overcharge protection The overcharge protection should work when the cell voltage or the voltage of cell block will be over 4.40V. However, in case that the charge system can control the cell voltage or the voltage of cell block within 4.40V, the overcharge protection can be under 4.45V. (For a Tablet (1S2P)) · Over discharge protection If cell voltage reaches approximately 2.2V/cell, we recommend the over discharge protection will shut down the discharge current and the circuit consumption current will be set to less than 1μA. · Over current protection If discharge current exceeds approximately 10.05A/cell, the over current protection will shut down the current. <p>(3) Electric circuit</p> <ul style="list-style-type: none"> · To avoid over discharge mode during long storage times, the consumption current of the battery pack's protection circuit should be set as low as possible. <p>(4) Cell connection</p> <ul style="list-style-type: none"> · The cells should not be connected using a soldering process. In order to avoid any damages, cells should be connected to lead plates by a spot welding method. <p>(5) Precautions on label</p> <ul style="list-style-type: none"> · The rating label should indicate required information and precautions. The precautions should be based on the information in section 2. 			
File No	UPF3259132-001	Portable Rechargeable Battery Business Division, SANYO Electric Co., Ltd.	

Title	Specifications of Lithium Ion battery (Pouch Type)	page	13/15
<p>11. Storing Condition</p> <p>11-1 Storage Temperature and Humidity (Within 3 months)</p> <ul style="list-style-type: none"> · Cells should be stored between -20°C to +40°C in a low humidity condition (less than 70 %RH) without any corrosive gases. · No condensation on the cell <p>11-2 Long Duration Storage</p> <ul style="list-style-type: none"> · Cells should be stored between -20°C to +20°C in a low humidity condition (less than 70%RH) without any corrosive gases. We recommend the discharged state or partially charged state SANYO shipped out for the long duration storage. · No condensation on cells. <p>12. Handling Precautions for Lithium Ion Cells</p> <p>12-1 Series Connections Precautions</p> <ul style="list-style-type: none"> · When cells are connected in series, make sure the lot number, the shipping charge date, and capacity rank match. Please do not mix cells with different lot numbers, shipping charge date, and capacity rank. Also, the voltage variability should be within 20mV. · The lot number, the shipping charge date and the capacity rank are indicated on the shipping carton label. · If cells are connected in series, the discharge end voltage should be set more than 3.0V/cell. <p>12-2 Inspection of the Battery Pack before Shipping</p> <p>All battery packs shall be inspected for:</p> <ul style="list-style-type: none"> · Voltage · Internal impedance · Function of protection circuit · Thermistor resistance · Thermal fuse <p>12-3 Abnormal Cells</p> <ul style="list-style-type: none"> · Do not use damaged cells by dropping, and/or short circuit and cells with electrolyte smell and any other damaged cells. <p>12-4 Precautions on Pack Assembly</p> <ul style="list-style-type: none"> · Do not use cells which got deformed, shorted, bended and/or cut of the laminate and cells with electrolyte smell when you assemble a battery. · Do not re-work the battery. 			
File No	UPF3259132-001	Portable Rechargeable Battery Business Division, SANYO Electric Co., Ltd.	

Title	Specifications of Lithium Ion battery (Pouch Type)		page	14/15
<p>13. Warranty Exemptions</p> <ul style="list-style-type: none"> · SANYO will not be liable for any damages that are caused by violations of the precautions in this specification. · SANYO will not be liable for any problems caused by design defects of the battery packs, Tablet and/or chargers. · SANYO will not accept any abnormal cells that were caused due to any incorrect assembly process. <p>14. Other Remarks</p> <ul style="list-style-type: none"> · If there are problems in this specification, SANYO will take them into consideration. · SANYO can discuss specs or precautions that are not described in this specification. · Do not use the provided cells for other applications. <p>15. Standard Charging Method</p> <p>(1) The standard charge condition is 3.35A/cell - 4.35V/cell (Constant current-constant voltage). The charging process should be discontinued when either the time, the current or battery voltage reaches certain values.</p> <p>(2) In case of the over discharge state (For example: Battery voltage is less than 2.0V/cell), the battery should be charged by a pre-charge system in order to prevent FET's heat generation in a circuit.</p> <p>(3) The pre-charging current should be approximately 0.10A. Once, the battery voltage reaches more than 3.0V/cell, the charger can resume the standard charging method. The pre-charging should have a cut-off timer and if the voltage doesn't recover over 3.0V/cell in the set time, the charging should be stopped.</p> <p>(4) The cell may be swelled during usage, continuous charging, and especially under the high temperature. Please consult SANYO for the charging method instructions.</p>				
File No	UPF3259132-001	Portable Rechargeable Battery Business Division, SANYO Electric Co., Ltd.		

Title	Specifications of Lithium Ion battery (Pouch Type)	page	15/15
-------	--	------	-------

16. Battery Warranty Period

The warranty period is limited to one year from date of shipment. SANYO will replace batteries if it is clear that there was a defect in SANYO's manufacturing process and that the battery was not misused.

17. Battery Safety Requirements

In order to ensure the safety of the battery, please contact SANYO to discuss the application design from a mechanical or a electrical viewpoint. Also, if there are special conditions (For example: lager current load, a quick charge method or an unique usage pattern), please contact SANYO to check the conditions before the product specification is fixed.

18. Precautions for Pouch Type Cells

Pouch type cells may swell during usage. The value described in the drawing is the thickness after 500 cycles (Please refer to section 6.3). Cell thickness may swell unexpectedly in the below scenarios:

- The charging voltage exceed 4.35V.
- The ambient temperate of usage is not 25 ± 2 °C.
- The battery is charged and discharged more than 500 cycles.
- The battery is stored for a long time.
- The battery is repeatedly charged while it is charged to full or nearly full.


19. Document Terms (Only Tentative Specification)

- (1) The expiration period for this document is 6 months.
- (2) If a new document is released, please return or dispose the old one.
- (3) This document is still preliminary. The contents are not fixed completely.

File No	UPF3259132-001	Portable Rechargeable Battery Business Division, SANYO Electric Co., Ltd.
---------	----------------	--

NO.	PART NAME	APPLICATION PART CODE	QTY.	MATERIAL SPECIFICATION	NOTE
	BATTERY		1	UPF3259132TA1	SHIPPING WITH CHARGE
1	LEAD PLATE	FOR POS.	1	ALUMINUM	
2	LEAD PLATE	FOR NEG.	1	NICKEL	

DRAWING NOT TO SCALE

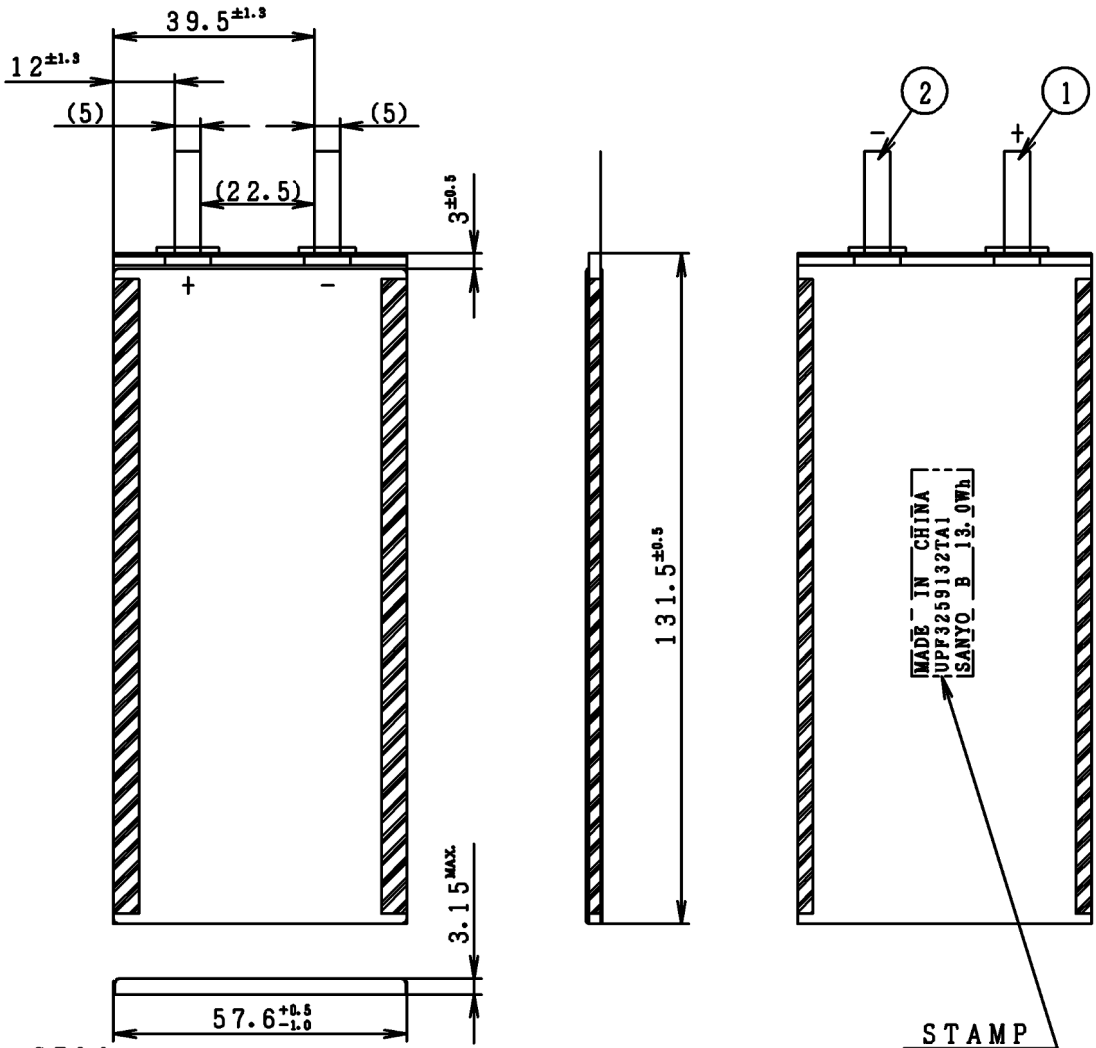

- NOTES.
- BARE CELL.
 - CELL MANUFACTURED LOT CODE TO BE PRINTED ON THE CAN.
 XXX
 DAY (1ST=1, 2ND=2...10TH=A, 11TH=B, ...30TH=X, 31ST=Y)
 MONTH (JAN=A, FEB=B, ...NOV=L, DEC=M)
 YEAR (2001=1, 2002=2, ...2013=D, 2014=E, ...)
 EX.) OCT. 16. 2013...DKG
 - AFTER FLOWING CONDITIONS.
 - AFTER DELIVERY CHARGE (MAX. 3.15 mm)
 - AFTER CYCLE CHARGING AND DISCHARGING (REFERENCE ONLY) (T. B. D mm)

DATE	REMARK	SYMBOL	DATE	DESCRIPTION
OCT. 16. 2013		△	OCT. 16. 2013	1st DRAWING (K. Yoshimoto)
DR	K. Yoshimoto	△		
CHK		△		
CHK		△		
ENG		△		
APP	M. Kagoshima	△		

MODEL:UPF3259132T-H001A	材料・規格
CUSTOMER CODE:	MATERIAL
TOLERANCE	処理・加工
250<L	±5
<L≤	±
50<L≤250	±4
10<L≤50	±3
L≤10	±2
WEIGHT	UNIT
Approx. g	部品名
◎ □	完成電池
UNIT mm	PART NAME
SCALE	BATTERY PACK (finish goods)
QTY	PART CODE
1	
SCALE 1/1.5	DRAWING NO
	UPF3259132T-H001A01
	Rev.